



Vane motors Single & double M3B - M4 / M4S series



Publ. 2 - AM 157 - B 07 / 97 / FB Replaces : 2 - AM 157 - A



GENERAL	General characteristics.....	3
	Technical data.....	4
	General characteristics.....	4
	Maximum speeds.....	5
	Maximum speed and maximum continuous pressure.....	6
	Motor selection.....	7
	Description.....	8
	Ports.....	9
	Hydraulic fluids.....	9
	Shafts.....	10
	Minimum replenishment pressure.....	10
	Notes.....	11
M3B	Performance curves.....	12 & 13
	Ordering code, technical data and operating characteristics.....	20
	Dimensions.....	21
M4C - M4SC	Performance curves.....	14 & 15
	Ordering code, technical data and operating characteristics.....	22
	Dimensions.....	23
M4D - M4SD	Performance curves.....	16 & 17
	Ordering code, technical data and operating characteristics.....	24
	Dimensions.....	25
M4E - M4SE	Performance curves.....	18
	Ordering code, technical data and operating characteristics.....	26
	Dimensions.....	27
M4DC - M4SDC	Performance curves.....	14 to 17
	Ordering code and technical data.....	28
	Dimensions (rear ports) and operating characteristics.....	29
	Dimensions (side and opposite ports).....	30
	Notes.....	31
	Addresses.....	32



HIGH STARTING TORQUE EFFICIENCY

The high starting torque efficiency of vane type motors makes them especially applicable in load hoist winch drives, swing drives and propulsion drives. This high starting torque efficiency allows the motor to start under high load without pressure overshoots, jerks and high instantaneous horsepower loads.

HIGH VOLUMETRIC EFFICIENCY

Vane motors begin life with high volumetric efficiency and maintain that efficiency throughout their operating life.

LOW TORQUE RIPPLE AT LOW SPEED

When operating at very low speeds on applications such as swing and load hoist drives, the vane motor exhibits very low torque ripple.

2 AND 3-SPEED VERSIONS AVAILABLE

The M4DC, because of its unequal size cartridges, allows the use of-3 speed operation. This makes them more applicable in traction drive circuits to replace manually shifted gear-boxes. 2-speed motors are available in a wider range of ratios than standard gear motors.

BALANCED DESIGN

Vane, rotor and cam ring are pressure balanced to increase life and efficiency over full speed range.

INTERCHANGEABLE ROTATING GROUPS

Rotating groups may be easily replaced to renew the motor or change displacement to suit altered requirements for speed or torque.

REVERSIBLE ROTATION

The motors may be stopped or reversed repeatedly and rapidly driving or braking the connected shaft load at controlled torque levels.

WIDE SPEED RANGE

Starting to maximum RPM, with full torque capability during acceleration.

PORTS AND MOUNTING

Conform fully to SAE J744c (ISO-3019-1) standards to simplify refitting and installation.

FIRE RESISTANT FLUIDS

Are easily used in the standard M3B and M4* versions of these motors. These include phosphate or organic ester fluids and blends, water-glycol solutions and water-oil invert emulsions.

M3B AND M4* SERIES MOTORS

The M3B and M4* have been designed especially for severe duty applications which require high pressure up to 3400 PSI, high speed up to 4000 RPM and low fluid lubricity (HF-1, HF-2A, HF-3, HF-4, HF-5).

TECHNICAL DATA - M3B AND M4* SERIES

Series	Size	Displ.	Theor. Displ.	Torque T	Power at	Torque T	Power P	
			V_i in ³ /rev.	in.lbf/PSI	100 Rev/min HP/100 PSI	n = 2000 RPM at Δp 2500 PSI		
						in.lbf	HP	
M3	B B1	009	.56	0.08	0.014	174.3	5.8	
		012	.75	0.11	0.018	236.3	7.8	
		018	1.13	0.19	0.030	412.4	13.4	
		027	1.70	0.30	0.046	680.5	21.8	
		036	2.26	0.38	0.060	902.6	28.3	
M4	C C1 SC SC1	024	1.49	0.24	0.037	535.4	17.0	
		027	1.72	0.28	0.043	619.5	19.7	
		031	2.11	0.33	0.054	768.0	24.1	
		043	2.84	0.45	0.072	1062.0	33.6	
		055	3.59	0.57	0.091	1318.6	41.8	
		067	4.34	0.69	0.111	1504.5	47.7	
		075	4.89	0.78	0.120	1752.2	55.6	
	D D1 SD SD1	062	3.97	0.63	0.102	1460.0	46.4	
		074	4.69	0.75	0.120	1770.0	56.2	
		088	5.56	0.88	0.139	2088.5	66.2	
		102	6.44	0.96	0.166	2336.3	74.1	
		113	7.12	1.13	0.185	2655.0	84.2	
		128	8.08	1.28	0.203	3009.0	95.5	
		138	8.81	1.40	0.222	3292.0	104.5	
	E E1 SE/SE1	153	9.67	1.54	0.240	3522.0	111.8	
		185	11.69	1.86	0.296	4283.2	136.0	
		214	13.55	2.16	0.342	5017.7	159.3	
	DC DC1 SDC SDC1	See M4C/C1/SC/SC1 and M4D/D1/SD/SD1						

Internal drain : All these motors may be equipped with internal drain. Then the model numbers will be M3B1, M4C1, M4SC1, M4D1, M4SD1, M4E1, M4SE1, M4DC1, M4SDC1.

For further information or if the performance characteristics outlined above do not meet your own particular requirements, please consult your local DENISON Hydraulics office.

GENERAL CHARACTERISTICS

	Mounting standard	Weight without connector and bracket - lbs	Moment of inertia lb.in ²	Option for inlet and outlet port
M3B	SAE J744c ISO/3019-1 SAE A	17.6	1.03	SAE threaded SAE 4 bolt J718c ISO/DIS 6162-1 - 3/4" BSPP threaded
M4C/SC	SAE J744c ISO/3019-1 SAE B	34.0	2.7	SAE threaded SAE 4 bolt J718c ISO/DIS 6162-1 - 1"
M4D/SD	SAE J744c ISO/3019-1 SAE C	59.5	1.4	SAE threaded SAE 4 bolt J718c ISO/DIS 6162-1 - 1 1/4"
M4E/SE	SAE J744c ISO/3019-1 SAE C	99.0	20.0	SAE threaded SAE 4 bolt J718c ISO/DIS 6162-1 - 2"
M4DC/SDC	SAE J744c ISO/3019-1 SAE C	88.0	10.0	SAE 4 bolt J718c ISO/DIS 6162-1 - 1 1/4" P2 = See M4C/M4SC

MAXIMUM SPEED, PRESSURE RATINGS - M3B AND M4* SERIES

Series	Size	Displ.	Max. pressure					Operating pressure range drain	Max. speed for low loaded condition ¹⁾	Max. speed for max. pressure ratings										
			HF-0	HF-2A	HF-1	HF-3	HF-4			HF-0, HF-2		HF-2A		HF-1						
			HF-2			HF-5				Cont.	Int. ²⁾	Cont.	Int. ²⁾	Cont.	Int. ²⁾					
			PSI	PSI	PSI	PSI	PSI	PSI	RPM	RPM	RPM	RPM	RPM	RPM						
M3	B B1	009	2500						22	4000	3000	3600								
		012	3000																	
		018																		
		027																		
		036																		
M4	C C1	024	2500	2500	2500			50	4000	2500	3600	2500	3000	2000	2500					
		027																		
		031																		
		043																		
		055																		
		067																		
		075																		
		SC SC1				024	3400									3000	2500	2500	2000	50
	027																			
	031																			
	043																			
	055																			
	067																			
	075																			
	D D1	062	2500	2500	2000				50	4000	2500	3000	2500	2800	2000	2500				
		074																		
		088																		
		102																		
		113																		
		128																		
		138																		
	SD SD1	062	3400	2700	2000	2000	2000			50	4000	2500	3000	2500	2800	1800	2200			
		074																		
		088																		
		102																		
		113																		
		128																		
		138																		
	E E1	153	2500	2500	2000						50	3600	2500	3000	2500	2800	1800	2200		
		185																		
		214																		
	SE SE1	153	2700	2500	2000	2000	2000					50	3600	2500	3000	2500	2800	1800	2200	
185																				
214																				
DC DC1	All models	2500	2500	2000			50	4000					2500	3000	2500	2800	2000	2500		
SDC SDC1	D-062 at 088	3400	2700	2000	2000	2000														
	C-024 at 043																			
	D-102																			
	D-113																			
	C-055																			
	C-067																			
	D-128																			
	D-138																			
C-075	2500	2500																		

1) Low loaded condition 500 PSI for M3 and M4, 1160 PSI max. for M4S (see page 6).

2) Intermittent speed - Do not exceed 6 seconds per minute of operation.


HF-0, HF-2 = Antiwear petroleum base. HF-2A = Crankcase. HF-1 = Non antiwear petroleum base. HF-5 = Synthetic fluids.

HF-3 = Water in oil emulsions. HF-4 = Water glycols.


Internal drain : All these motors may be equipped with internal drain. Then the model numbers will be M3B1, M4C1, M4SC1, M4D1, M4SD1, M4E1, M4SE1, M4DC1, M4SDC1.

MAX. SPEED AND MAX. CONTINUOUS PRESSURE - M3B AND M4* SERIES


M3B

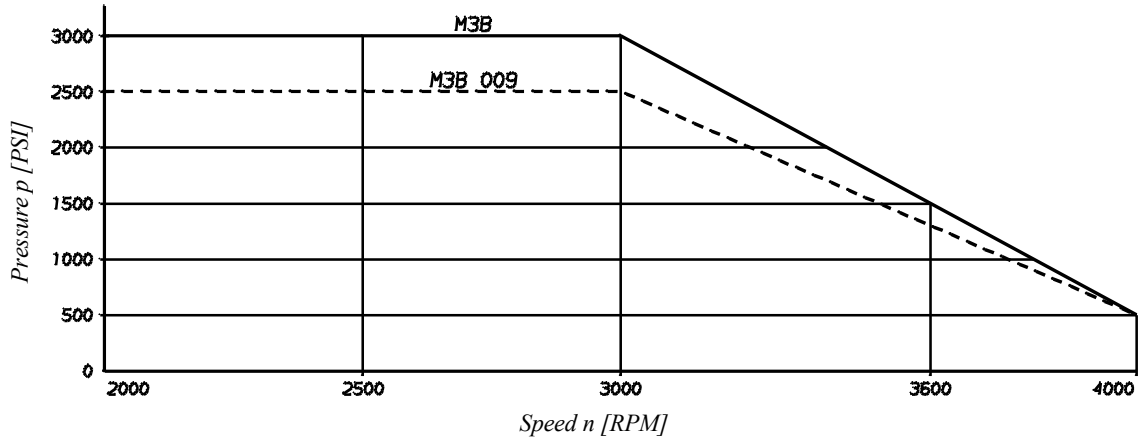


M4C/M4SC

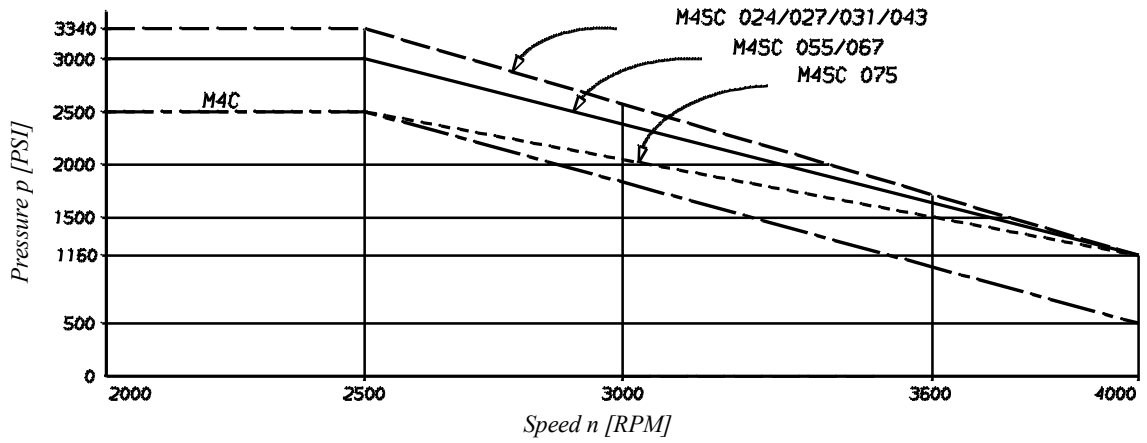

M4D/M4SD

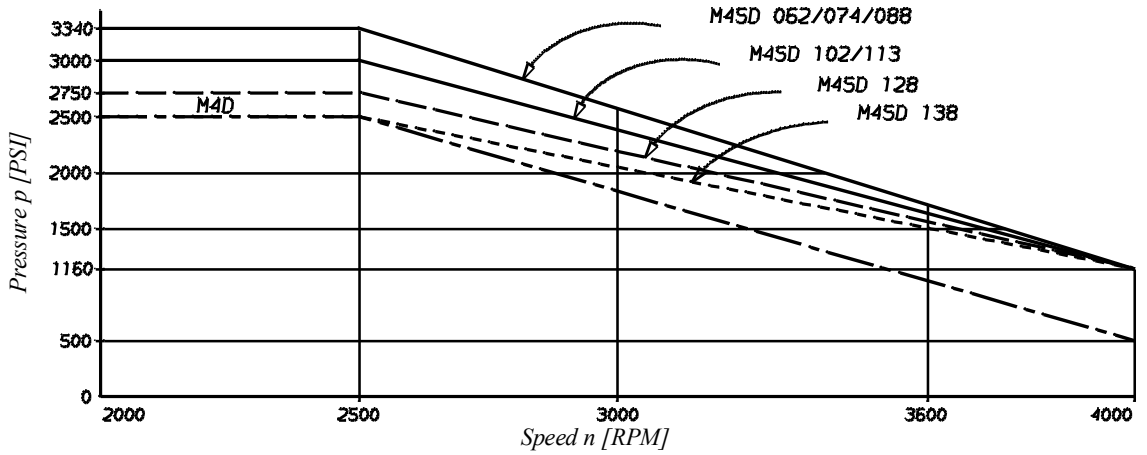

M4E/M4SE

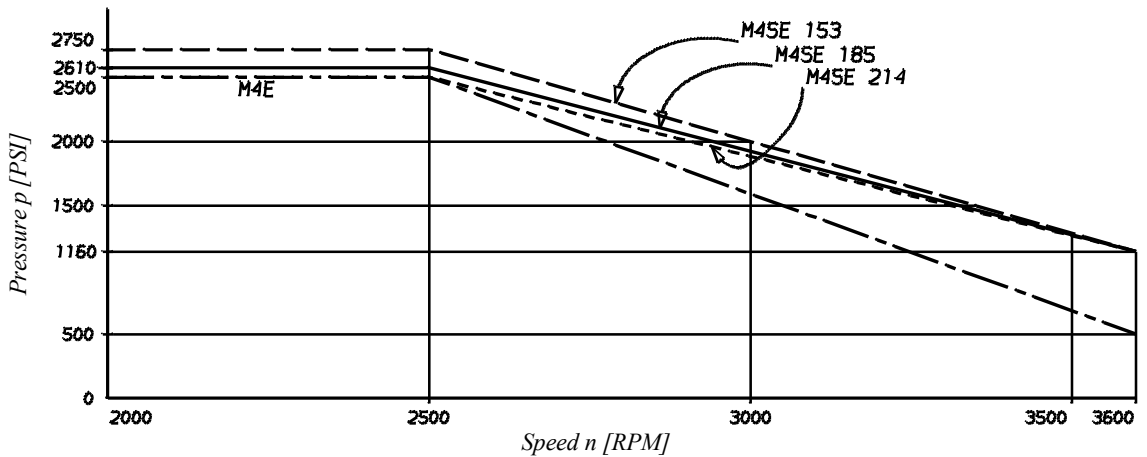

Performances required

Torque	T [in.lbf]	1240
Pump flow (available) at 115 SUS	q_{ve} [GPM]	30.4
Speed	n [RPM]	1500
Pressure	p [PSI]	2500

1. Check if available power is compatible with required power (0.85 estimated overall efficiency).

$$0.85 \times \frac{Q_{ve} \times p}{1714} \geq \frac{T \times RPM}{63025}$$

$$0.85 \times \frac{30.4 \times 2500}{1714} \geq \frac{1240 \times 1500}{63025}$$

$$37.7 > 29.5$$

Two ways of calculation :

2a. Calculate V_i from T required torque

$$V_i = \frac{2 \pi \times T}{p} = \frac{2 \pi \times 1240}{2500} = 3.12 \text{ in}^3/\text{rev.}$$

3a. Motor choose from V_i immediately greater

$$M4C 055 V_i = 3.59 \text{ in}^3/\text{rev.}$$

4a. Check real motor pressure for

$$T = 1240 \text{ in.lbf around } 1500 \text{ RPM}$$

$$M4C 055 T = 1240 \text{ in.lbf } n = 1500 \text{ RPM}$$

$$p = 2370 \text{ PSI (see page 15)}$$

5a. Flow loss M4C 055 at 2370 PSI at 115 SUS

$$q_{vs} = 4.2 \text{ GPM (see page 22)}$$

$$\text{Real flow used by the motor :}$$

$$q_V = q_{ve} - q_{vs} = 30.4 - 4.2 = 26.2 \text{ GPM}$$

6a. Real speed of the motor :

$$n = \frac{q_V \times 231}{V_i} = \frac{26.2 \times 231}{3.59} = 1686 \text{ RPM}$$

Real performances

V_i	=	3.59 in ³ /rev.	} M4C 055
n	=	1680 RPM	
T	=	1240 in.lbf	
p	=	2370 PSI	

2b. Calculate V_i from q_{ve} available flow

$$V_i = \frac{30.4 \times 231}{1500} = 4.68 \text{ in}^3/\text{rev.}$$

3b. Motor choose from V_i immediately smaller

$$M4C 067 V_i = 4.34 \text{ in}^3/\text{rev. (see page 22)}$$

4b. Check motor press. with $T = 1240$ in.lbf at 1500 RPM

$$M4C 067 T = 1240 \text{ in.lbf } n = 1500 \text{ RPM}$$

$$p = 2030 \text{ PSI (see page 15)}$$

5b. Flow loss of M4C 067 at 2030 PSI at 115 SUS

$$q_{vs} = 3.7 \text{ GPM (see page 22)}$$

$$\text{Real flow used by the motor :}$$

$$q_V = q_{ve} - q_{vs} = 30.4 - 3.7 = 26.7 \text{ GPM}$$


6b. Real speed of the motor :

$$n = \frac{q_V \times 231}{V_i} = \frac{26.7 \times 231}{4.34} = 1420 \text{ RPM}$$

Real performances

V_i	=	4.34 in ³ /rev.	} M4C 067
n	=	1420 RPM	
T	=	1240 in.lbf	
p	=	2030 PSI	

In each case always choose the smallest motor which will operate at the highest speed and pressure, and offers the most efficient solution.

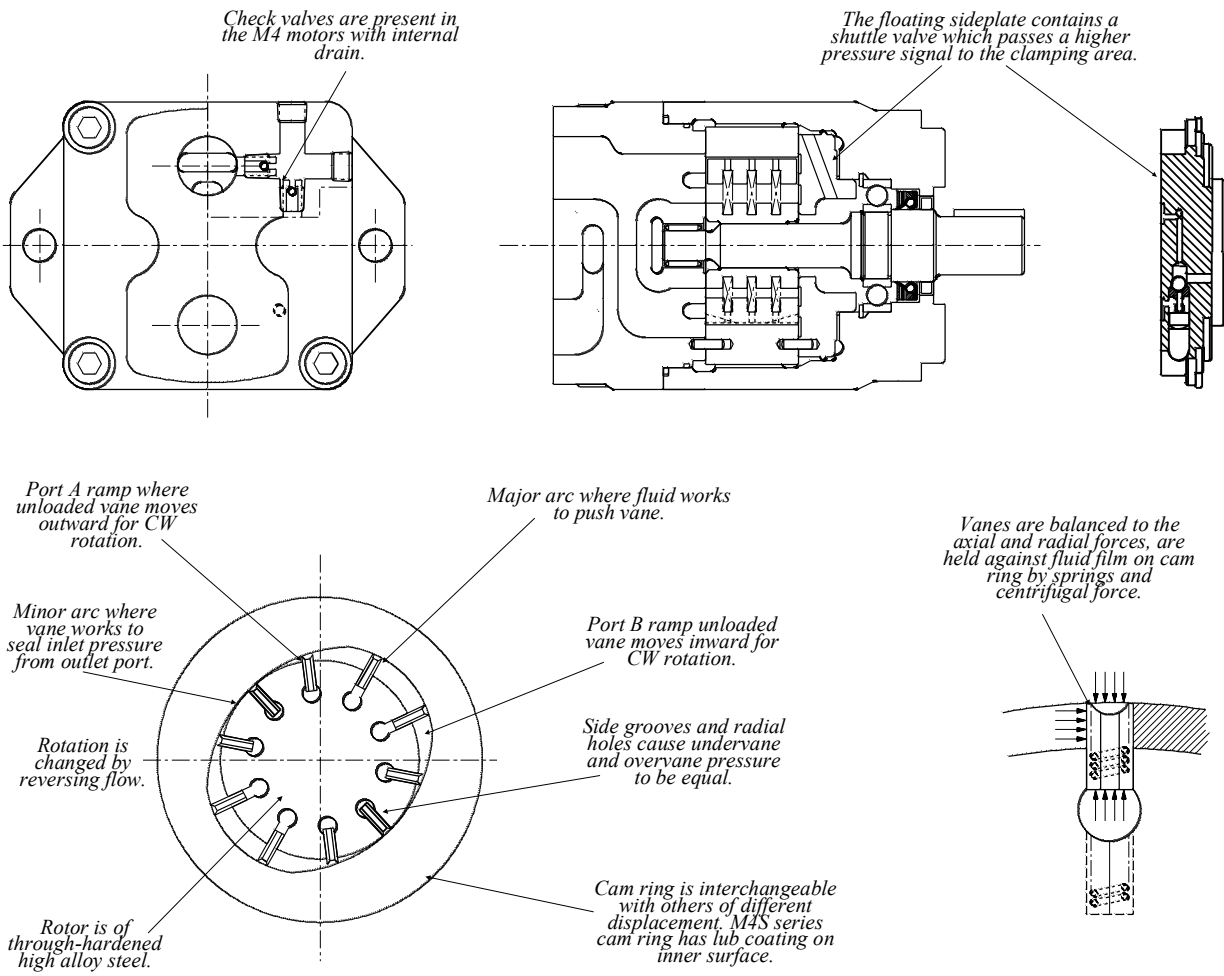

OPERATION - SINGLE CARTRIDGE

- The motor shaft is driven by the rotor. Vanes, closely fitted into the rotor slots move radially to seal against the cam ring. The ring has two major and two minor radial sections joined by transitional sections called ramps. These contours and the pressures exposed to them are balanced diametrically.
- Light springs urge the vanes radially against the cam contour assuring a seal at zero speed so the motor can develop starting torque. The springs are assisted by centrifugal force at higher speeds. Radial grooves and holes through the vanes equalize radial hydraulic forces on the vanes at all times. Fluid enters and leaves the motor cartridge through opening in the side plates at the ramps. Each motor port connects to two diametrically opposed ramps. Pressurized fluid entering at Port A torques the rotor clockwise. The rotor transports it to the ramp openings which connect to Port B from which it returns to the low pressure side of the system. Pressure at Port B torques the rotor counter-clockwise.
- The rotor is separated axially from the sideplate surfaces by the fluid film. The front sideplate is clamped against the cam ring by the pressure, maintains optimum clearance as dimensions change with temperature and pressure. A 3-way shuttle valve in the sideplate causes clamping pressure in Port A or B, whichever is the highest.
- Materials are chosen for long life efficiency. Vanes, rotor and cam ring are made out of hardened high alloy steels. Cast semi-steel sideplates are chemically etched to have a fine crystalline surface for good lubrication at start-up.

**PORTS
EXTERNALLY DRAINED
SINGLE CARTRIDGE MOTORS**

These motors may be alternately pressurized at Ports A & B to 3400 PSI max. Whichever port is at low pressure should not be subjected to more than 500 PSI. If it is necessary to exceed these limitations, please contact DENISON Hydraulics for application assistance.

**INTERNALLY DRAINED
TANDEM CARTRIDGE MOTORS**

These motors must have a drain line connected to the center housing drain connection of sufficient size to prevent back pressure in excess of 50 PSI, and returned to the reservoir below the surface of the oil as far away from the supply pump suction as possible. Model M4DC1 does not require an external drain line, however the outlet pressure must not exceed 50 PSI.

**INTERNALLY DRAINED MOTORS
(M4C1, M4D1, M4E1, M4DC1)**

May be alternately pressurized at Ports A & B to 3400 PSI max. Whichever port is at low pressure must not be subjected to more than 22 PSI for M3B, 50 PSI for M4* (pressure peak 100 PSI).

To insure maximum motor performance in conjunction with your specific application, consult your DENISON Hydraulics Representative if your application requires :

- minimum speed of less than 100 RPM,
- indirect drive,
- overrunning loads,
- braking or retarding.

M4S SEVERE DUTY MOTORS

M4S motors are recommended to be used when back pressure is over 2000 PSI and speed is over 2000 RPM. They are also recommended when fluid viscosity can be under 115 SUS and speed over 2000 RPM. For such severe duty applications M4S motors will exhibit longer life time at high efficiency.

RECOMMENDED FLUIDS

Petroleum based antiwear R & O fluids.

These fluids are the recommended fluids for M3B and M4* series motors. Maximum catalog ratings and performance data are based on operation with these fluids. These fluids are covered by DENISON Hydraulics HF-0 and HF-2 specifications.

Acceptable alternate fluids :

**ACCEPTABLE ALTERNATE
FLUIDS**

The use of fluids other than petroleum based antiwear R & O fluids requires that the maximum ratings of the motors will be reduced. In some cases, the minimum replenishment pressures must be increased. Refer to the following chart and the operating characteristics chart for each M3B and M4* motor model for specific details of the reduced ratings.

VISCOSITY

Max. (cold start, low speed & pressure)	_____	3900 SUS
Max. (full speed & pressure)	_____	500 SUS
Optimum (max. life)	_____	140 SUS
Min. (full speed & pressure for HF-1 fluid)	_____	89 SUS
Min. (full speed & pressure for HF-0 & HF-2 fluids)	_____	59 SUS

VISCOSITY INDEX

90° min. Higher values extend range of operating temperatures and life time.

Maximum fluid temperature (θ) °F

HF-0, HF-1, HF-2 _____ + 176°

Minimum fluid temperature (θ) °F

HF-0, HF-1, HF-2 _____ - 0.4°

FLUID CLEANLINESS

The fluid must be cleaned before and during operation to maintain contamination level of NAS 1638 class 8 (or ISO 18/14) or better. Filters with 25 micron (or better, β10 ≥ 100) nominal ratings may be adequate but do not guarantee the required cleanliness levels.

**OPERATING TEMPERATURES
AND VISCOSITIES**

Operating temperatures are a function of fluid viscosities, fluid type, and the pump. Fluid viscosity should be selected to provide optimum viscosity at normal operating temperatures. For cold starts the pumps should be operated at low speed and pressure until fluid warms up to an acceptable viscosity for full power operation.

**WATER CONTAMINATION IN
THE FLUID**

Maximum acceptable content of water.

- 0,10 % for mineral base fluids.
 - 0,05 % for synthetic fluids, crankcase oils, biodegradable fluids.
- If amount of water is higher then it should be drained off the circuit.

SHAFTS AND MINIMUM REPLENISHMENT PRESSURE (PSI) - M3B AND M4* SERIES

SPLINED SHAFTS COUPLINGS SPLINES

- The mating female spline should be free to float and find its own center. If both members are rigidly supported, they must be aligned within .006 TIR or less to reduce fretting. The angular alignment of two spline axes must be less than $\pm .002$ per 1".
- The coupling spline must be lubricated with a lithium molydisulfide grease or a similar lubricant.
- The coupling must be hardened to a hardness between 27 and 45 HRc.
- The female spline must be made to conform to the Class 1 fit as described in SAE-J498b (1971). This is described as a Flat Root Side Fit.

KEYED SHAFT

DENISON Hydraulics supplies the M3B and M4* series keyed shaft motors with high strength heat-treated keys. Therefore, when installing or replacing these motors, the heat-treated keys must be used in order to ensure maximum life in the application. If the key is replaced, it must be a heat-treated key between 27 and 34 R.C. hardness. The corners of the keys must be chamfered .03 to .04 at 45° to clear radii in the key way.

NOTE

Alignment of keyed shafts must be within tolerances given for splined shafts.

SHAFT LOADS

Axial or radial load are permissible. Consult specific sections for more details.

MINIMUM REPLENISHMENT PRESSURE (PSI)

Series	Speed [RPM] - Oil viscosity = 150 SUS				
	500	1000	2000	3000	3600
M3B	8.7	14.5	27.6	50.8	84.2
M4C/SC	10.2	20.3	45.0	79.8	135.0
M4D/SD	10.2	20.3	45.0	79.8	135.0
M4E/SE	20.3	40.6	75.5	159.6	
M4DC/SDC					
2-C-DC	24.7	55.1	145.1	325.1	410.7
2-D-DC	16.0	24.7	79.8	155.3	219.2
3-D-C-DC	24.7	55.1	145.1	325.1	410.7


The inlet port of the fluid motor must be supplied with replenishment pressure as listed above to prevent cavitation during dynamic braking. These pressures should be multiplied by a coefficient of 1,5 for M4S motors used with fire resistant fluids (HF-3, HF-4, HF-5).

Replenishment pressure for tandem 2 & 3-speed motors must be provided during periods when the motor is dynamic braking, shutting down or coasting. When the motor is operating in the high speed mode and the nonworking cartridge is at low pressure, it is necessary to create a back pressure, as listed above, at the motor discharge port. The above mentioned minimum replenishment pressure chart is for maximum displacement cartridges. Smaller cartridges require lower minimum pressures.


Contact DENISON Hydraulics for further information.

PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M3B SERIES


M3B 009

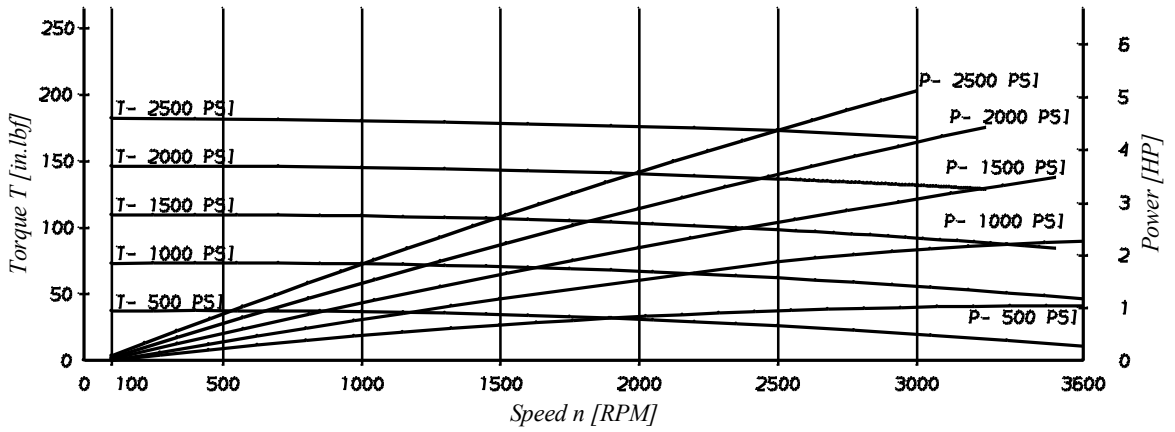


M3B 012

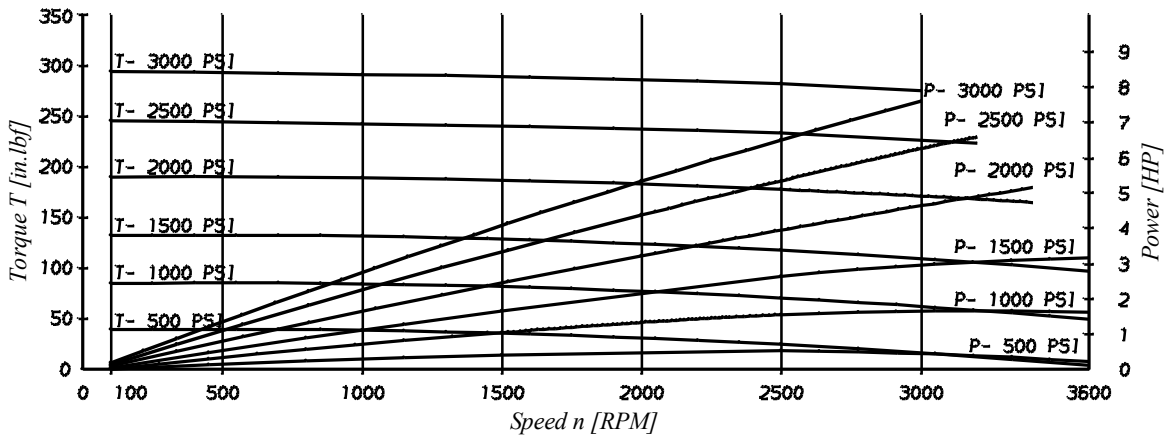

M3B 018

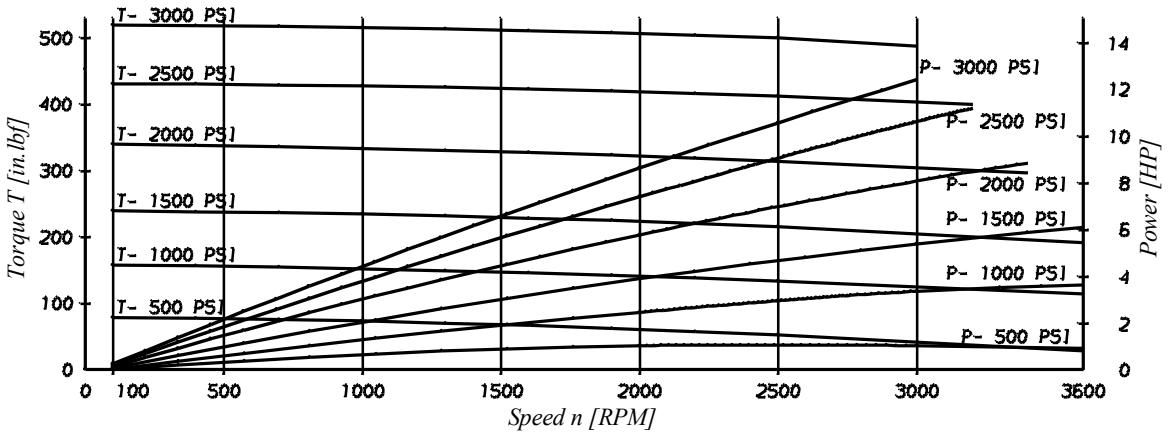


M3B 027

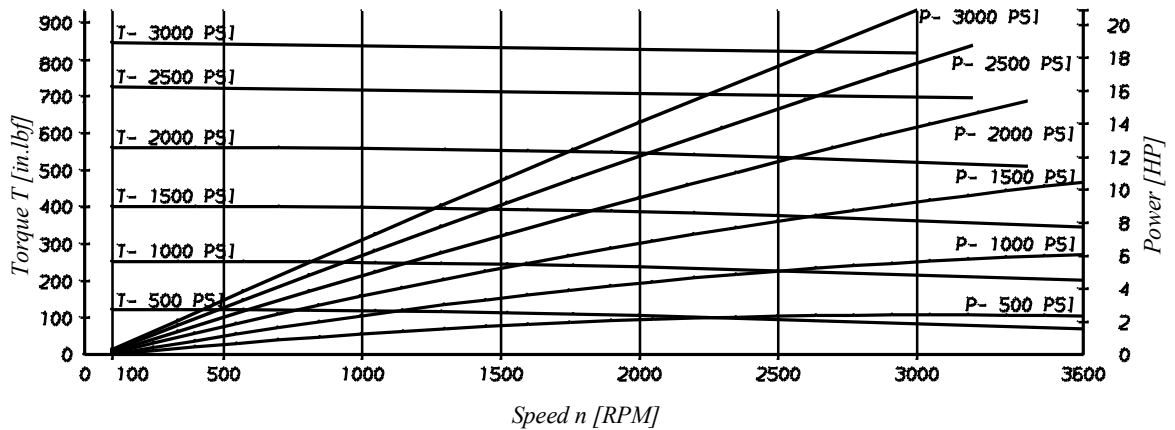


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M3B SERIES

M3B 036

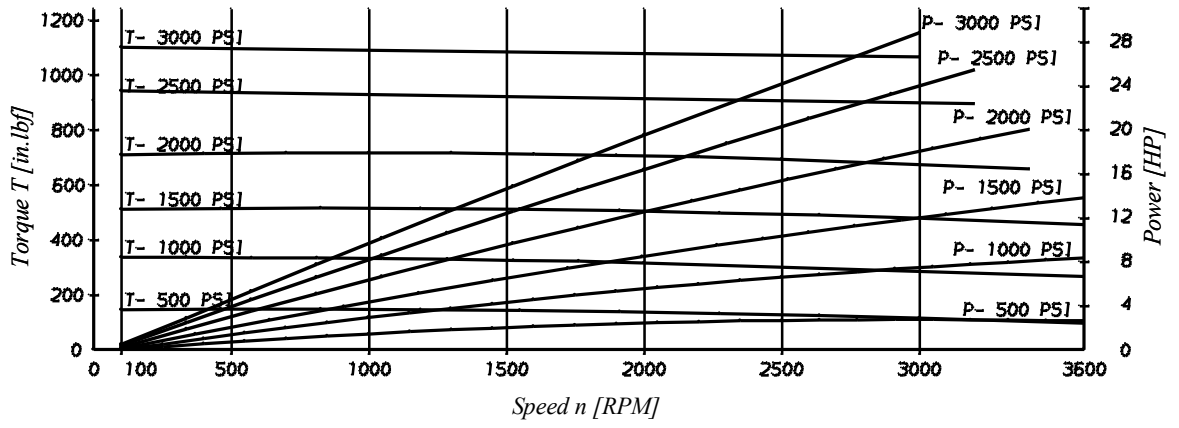


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M4* SERIES


M4C 024

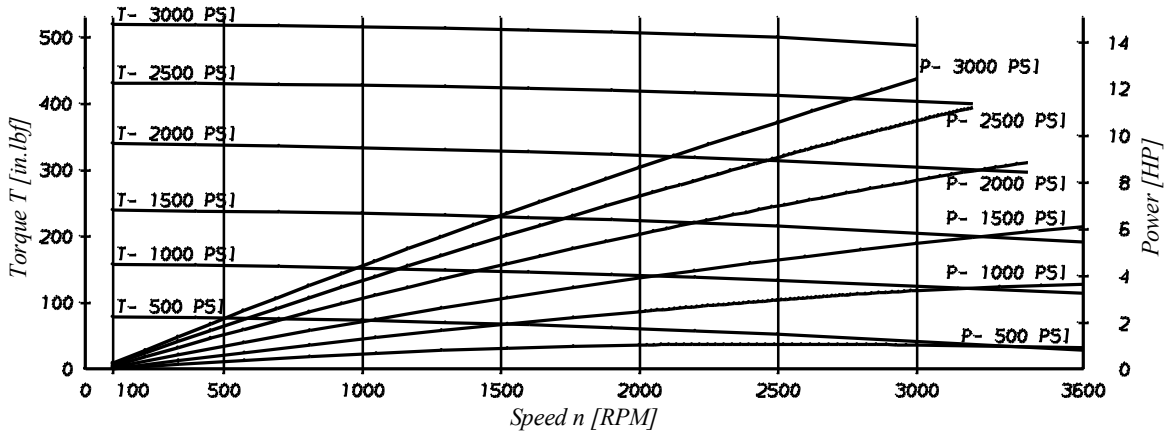


M4C 027

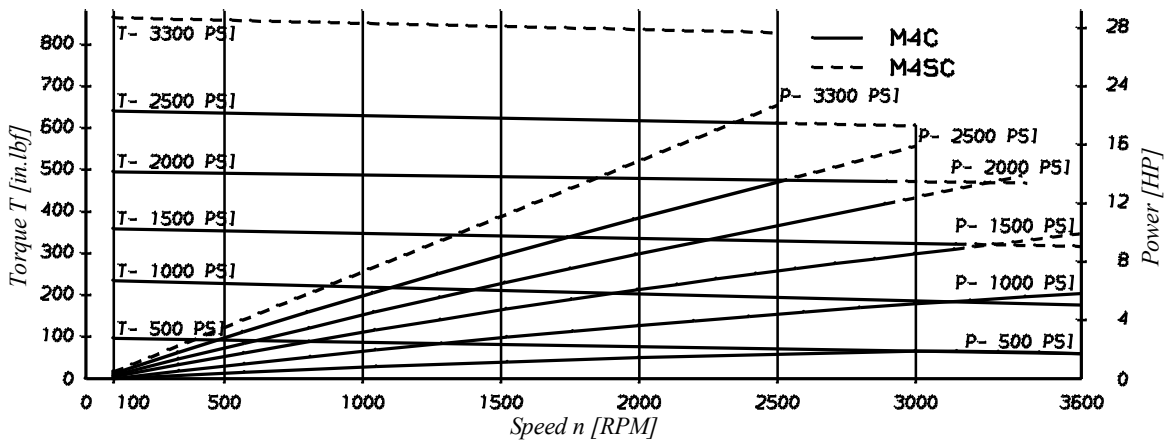

M4C 031

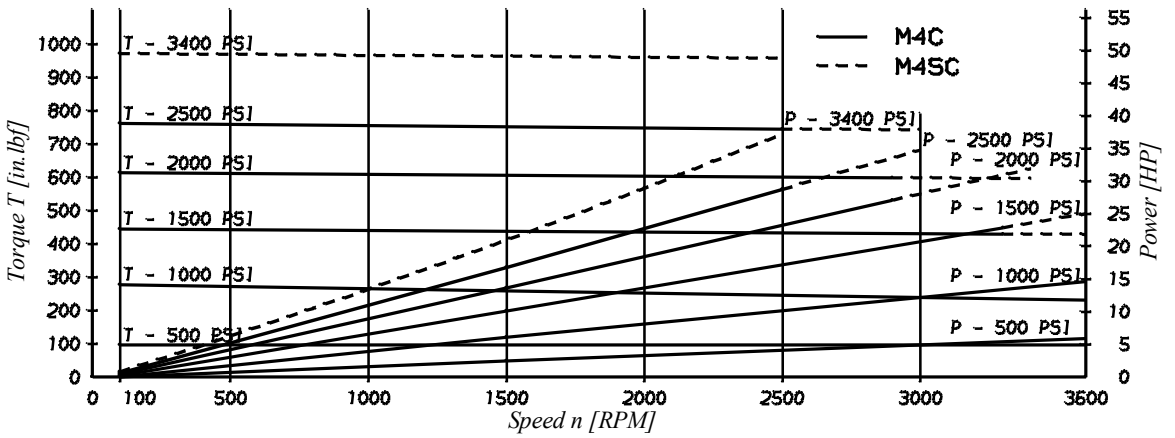


M4C 043

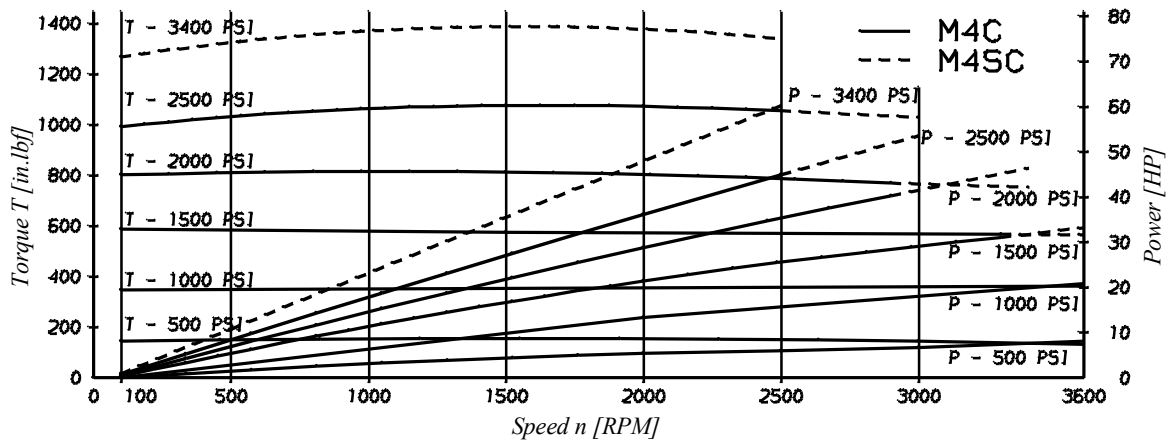


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M4* SERIES


M4C 055

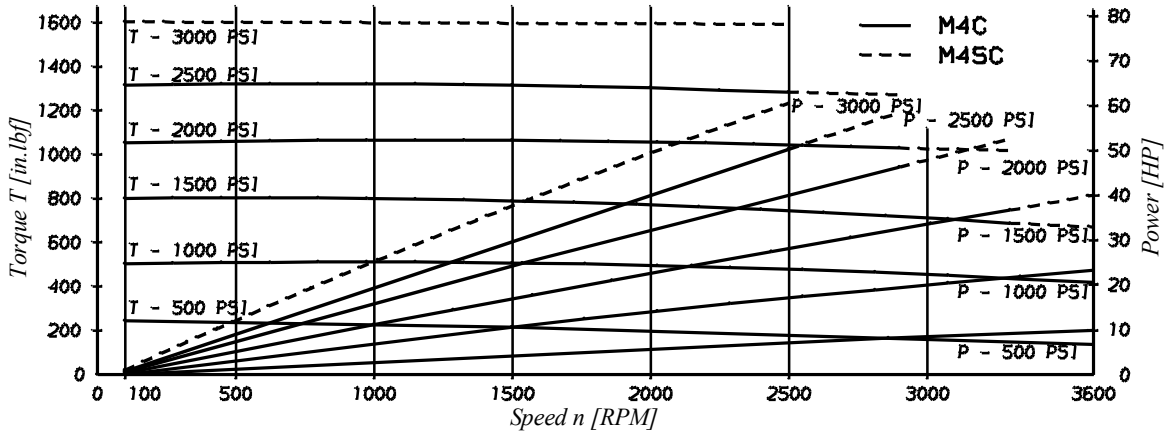

M4C 067

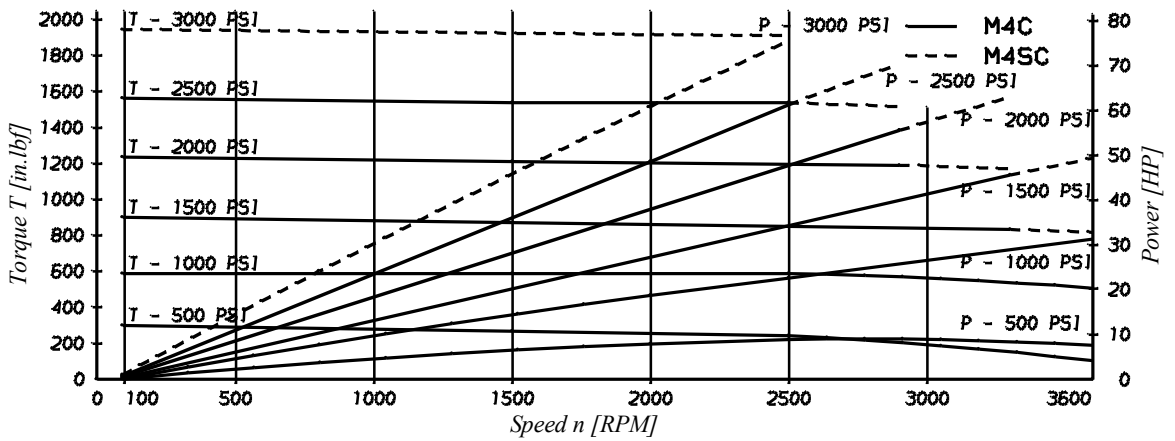


M4C 075

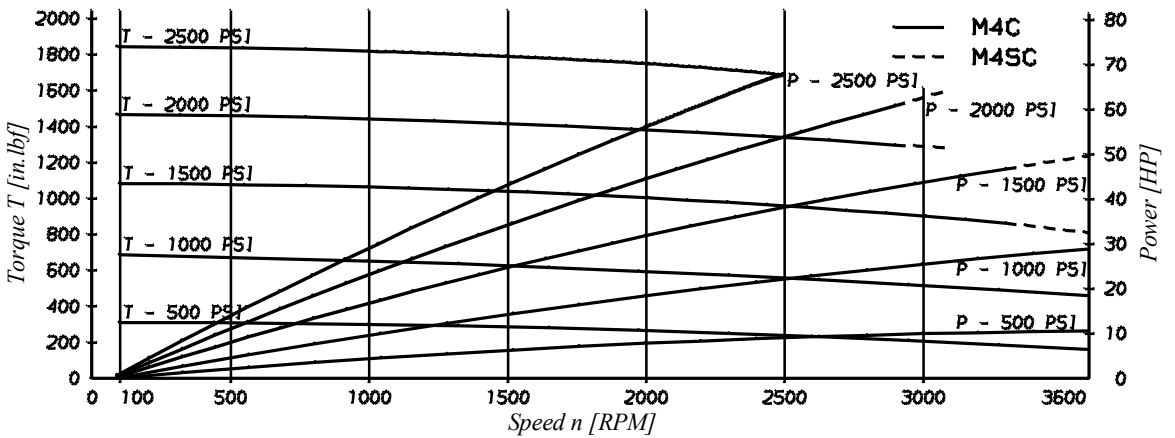


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M4* SERIES


M4D 062

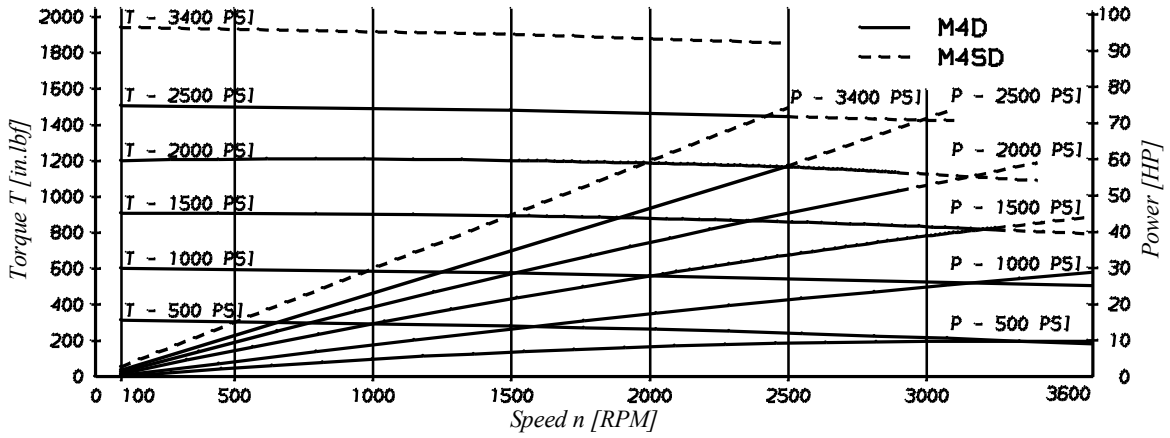


M4D 074

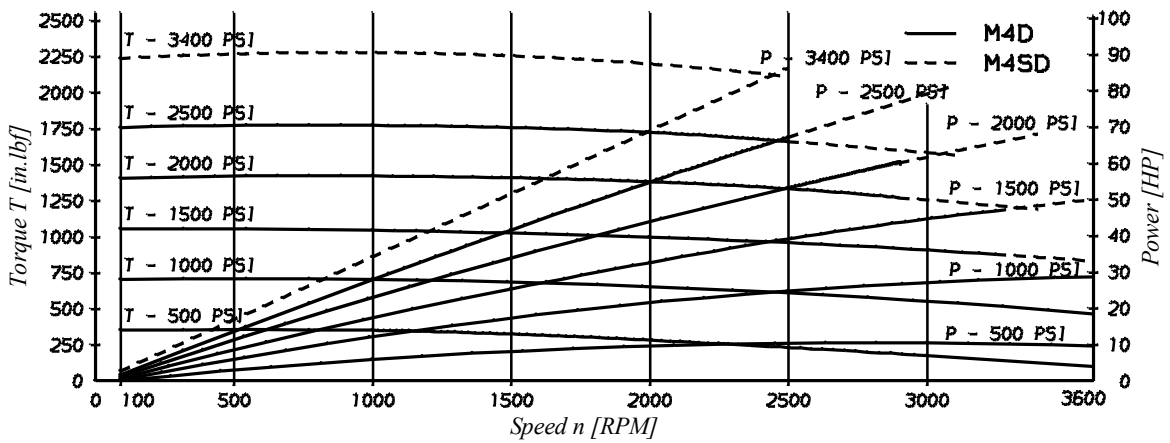

M4D 088

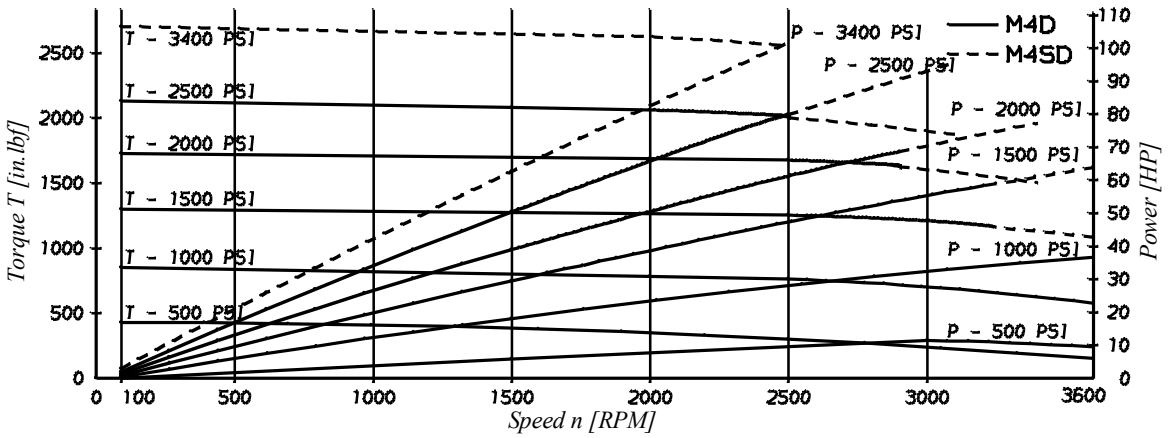


M4D 102

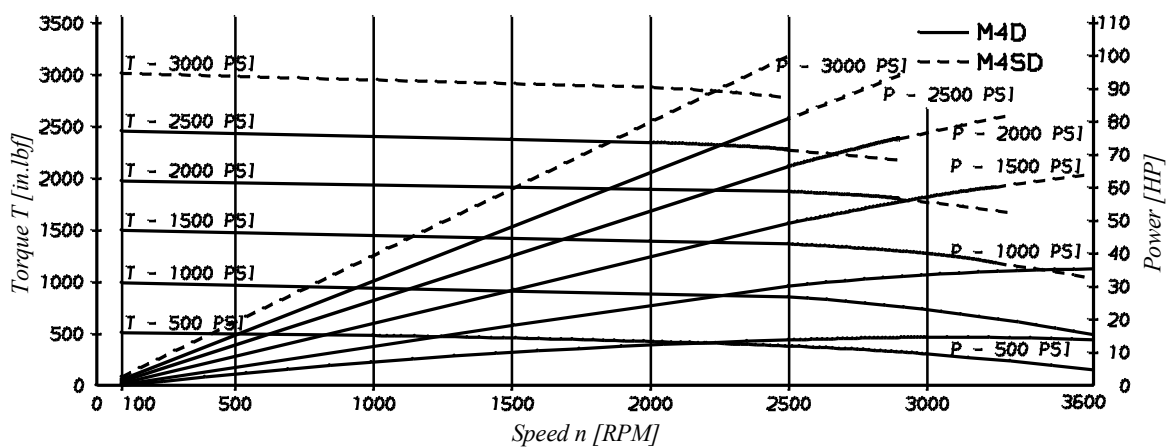


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M4* SERIES


M4D 113

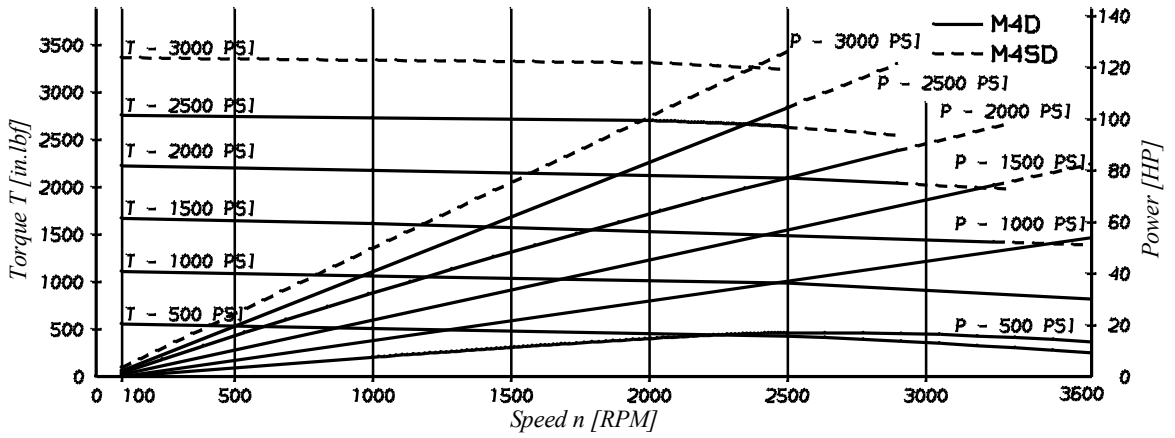

M4D 128

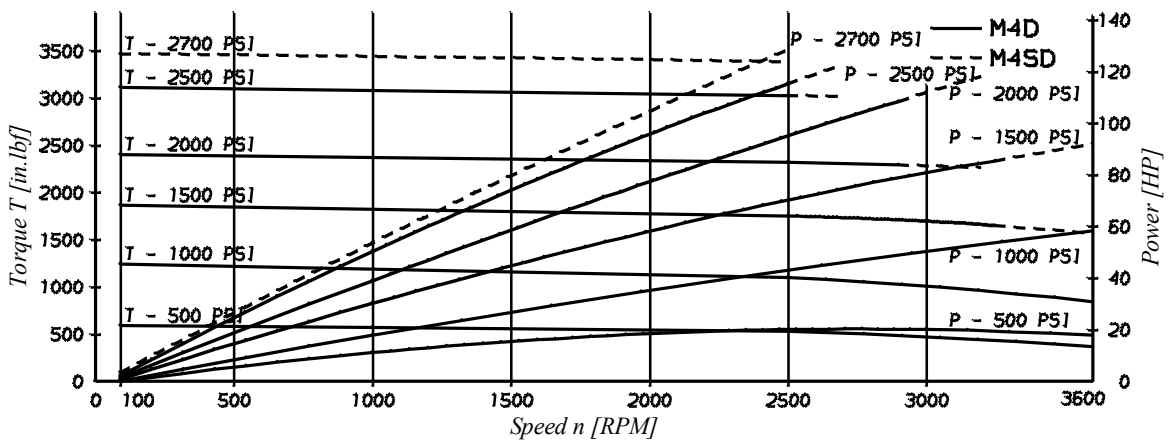


M4D 138

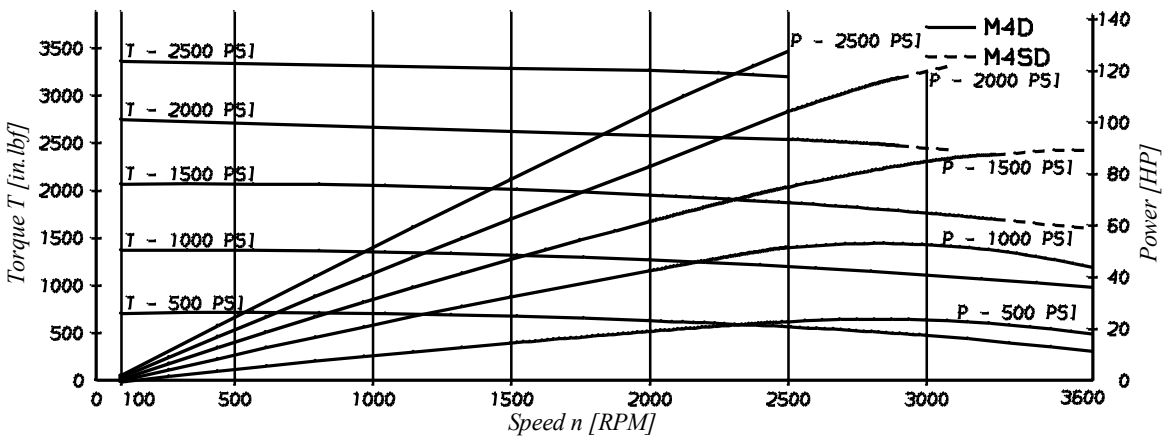


PERFORMANCE CURVES - OIL VISCOSITY : 115 SUS (45°) - M4* SERIES


M4E 153

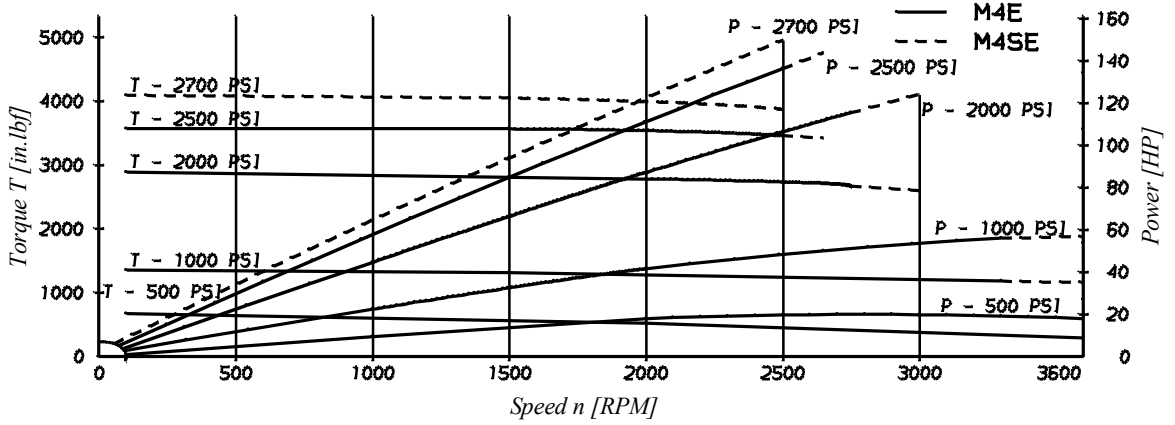

M4E 185

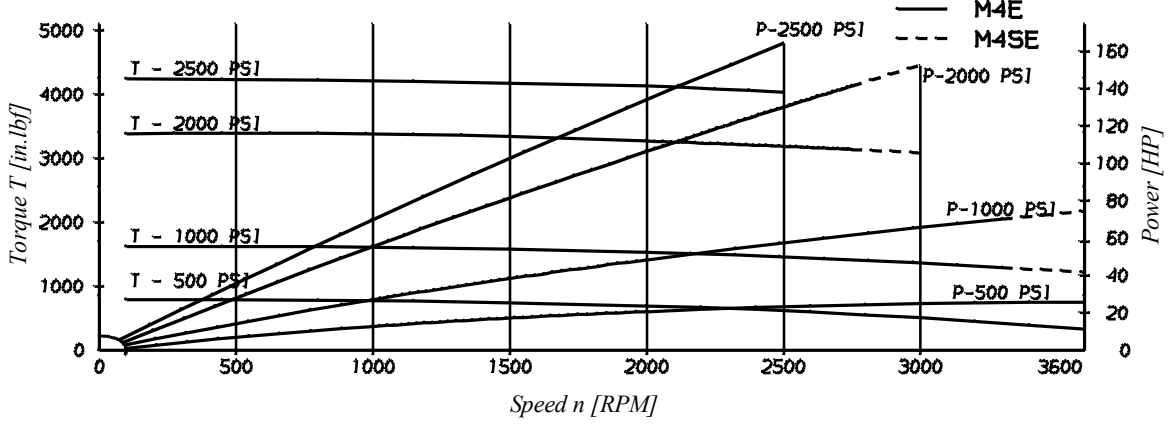

M4E 214

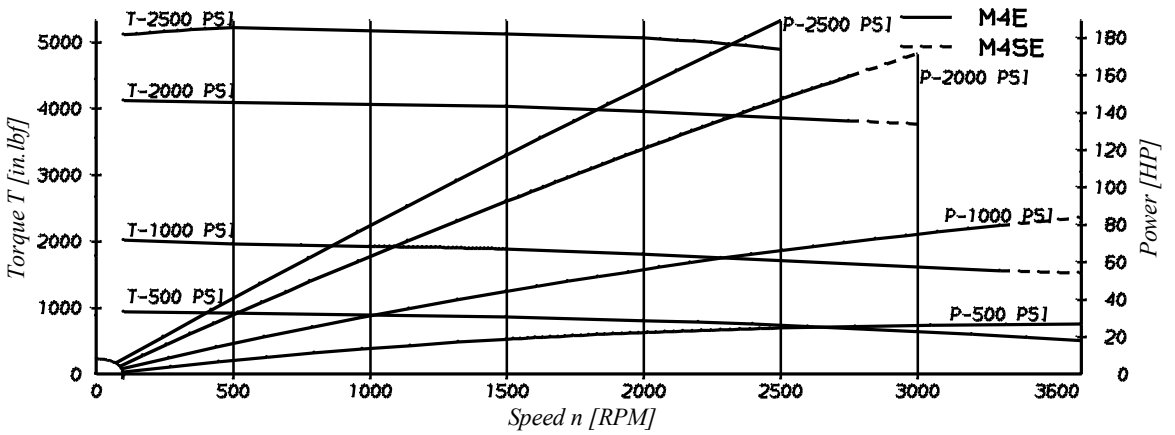

ORDERING CODE - M3B SERIES

Model No. M3B1
M3B - 036 - 1 N 00 - B 1 01 ..

Series external drain _____
Series internal drain _____
Torque _____
 009 = .08 in.lb/PSI
 012 = .11 in.lb/PSI
 018 = .19 in.lb/PSI
 027 = .30 in.lb/PSI
 036 = .38 in.lb/PSI

Type of shaft _____
 1 = keyed (non SAE)
 3 = splined (SAE A)
 4 = splined (SAE B)


Rotation _____
 N = bi-directional

Modification _____
Port connections
 00 = SAE threaded port
 SAE drain
 01 = SAE 4 bolt flange
 BSPP drain
 02 = BSPP threaded port
 BSPP drain


Seal class
 1 = S1 - BUNA N
 4 = S4 - EPDM
 5 = S5 - VITON

Design letter _____
Porting combination
 00 = standard


View from shaft end :
 CW rotation A = inlet B = outlet
 CCW rotation A = outlet B = inlet

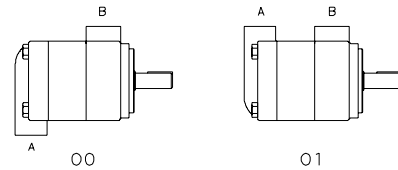

INTERNAL LEAKAGE

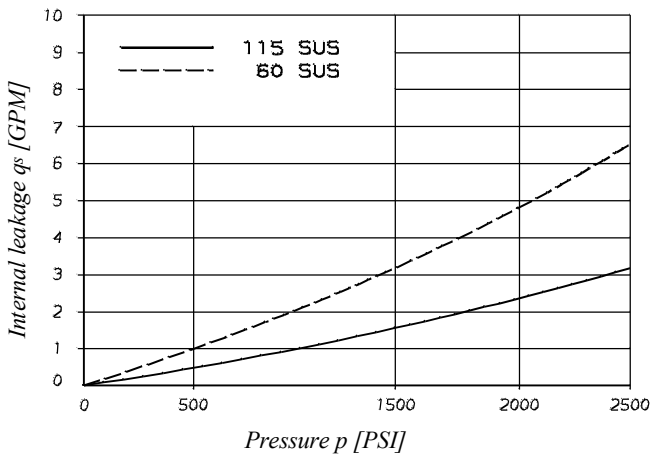

PERMISSIBLE RADIAL AND AXIAL LOADS

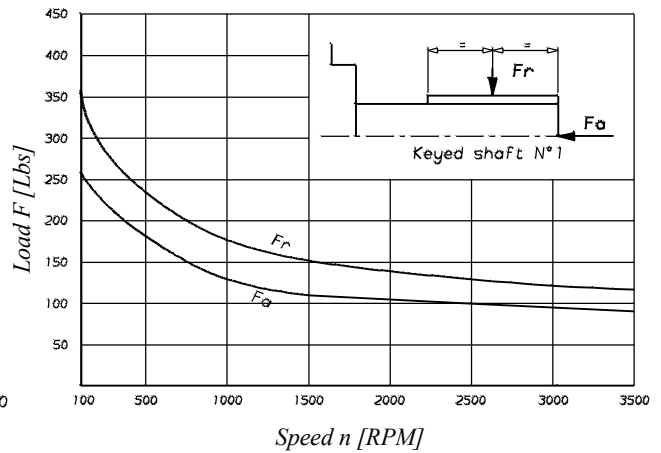

Do not apply Fr and Fa loads simultaneously

OPERATING CHARACTERISTICS - TYPICAL [115 SUS]

Model	Volumetric displacement V_i in ³ /rev.	Input flow at n = 2000 RPM		Torque T	Power output
		Theoretical GPM	at 2500 PSI Δp GPM	at n = 2000 RPM	at n = 2000 RPM
				at 2500 PSI Δp in.lbf	at 2500 PSI Δp HP
M3B 009	.56	4.9	8.0	174.3	5.8
M3B 012	.75	6.5	9.7	236.3	7.8
M3B 018	1.13	9.8	12.9	412.4	13.4
M3B 027	1.70	14.7	17.8	680.5	21.8
M3B 036	2.26	19.6	22.8	902.6	28.3

ORDERING CODE - M4C - M4SC SERIES

Model No. M4*C1
M4*C - 067 - 1 N 00 - A 1 02 ..

Series external drain _____

Series internal drain _____

Torque _____

024 = .24 in.lb/PSI
027 = .28 in.lb/PSI
031 = .33 in.lb/PSI
043 = .45 in.lb/PSI
055 = .57 in.lb/PSI
067 = .69 in.lb/PSI
075 = .78 in.lb/PSI

Type of shaft _____

1 = keyed (SAE B)
2 = keyed (non SAE)
3 = splined (SAE B)

Rotation _____

N = bi-directional

Modification _____

Port connections
01 = SAE threaded port
SAE drain
02 = SAE 4 bolt flange
UNC threaded - SAE drain
04 = SAE 4 bolt flange
UNC threaded - BSPP drain
M4 = SAE 4 bolt flange
metric threaded - BSPP drain

Seal class
1 = S1 (M4C)
5 = S5 (M4SC)

Design letter _____


Porting combination
00 = standard

* = S = Severe duty motor.


M4C1 - M4SC1 : Drain port is plugged.

View from shaft end :


CW rotation A = inlet
B = outlet
CCW rotation A = outlet
B = inlet

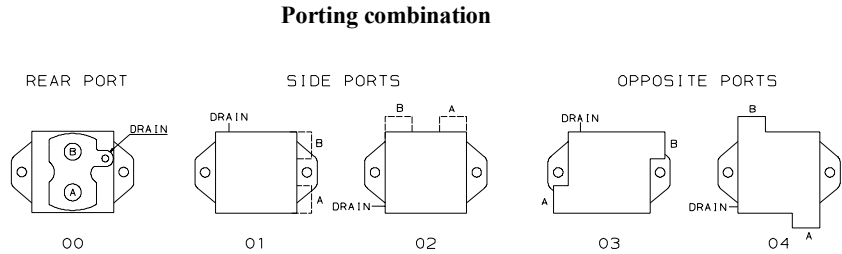

INTERNAL LEAKAGE

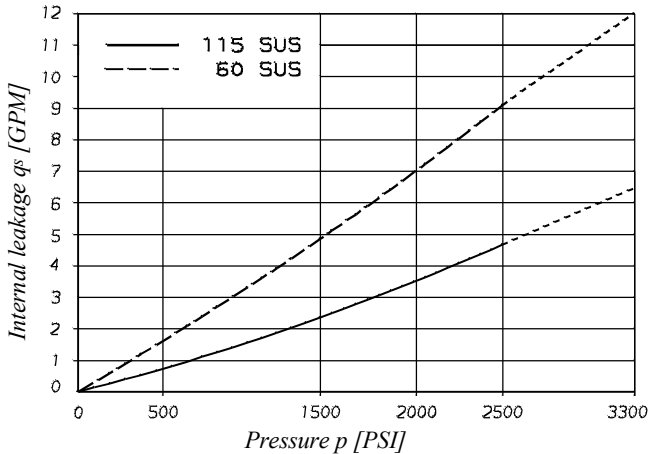

PERMISSIBLE RADIAL AND AXIAL LOADS


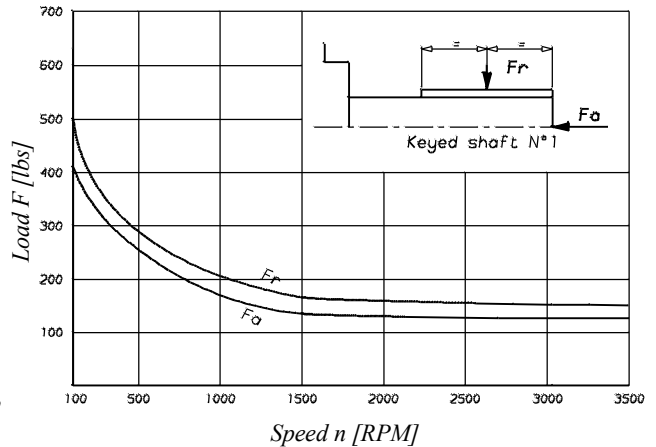


Do not apply Fr and Fa loads simultaneously

OPERATING CHARACTERISTICS - TYPICAL [115 SUS]




Model	Volumetric displacement V_i in ³ /rev.	Input flow at n = 2000 RPM		Torque T at n = 2000 RPM		Power output at n = 2000 RPM	
		Theoretical	at 2500 PSI Δp	at 2500 PSI Δp	at 2500 PSI Δp		
		GPM	GPM	in.lbf	HP		
M4C - M4SC 024	1.49	13.0	17.7	535.4	17.0		
M4C - M4SC 027	1.72	14.8	19.5	619.5	19.7		
M4C - M4SC 031	2.11	18.5	23.2	768.0	24.0		
M4C - M4SC 043	2.84	24.6	29.3	1062.0	33.6		
M4C - M4SC 055	3.59	31.2	36.0	1318.6	41.8		
M4C - M4SC 067	4.34	37.5	42.3	1504.5	47.7		
M4C - M4SC 075	4.89	42.3	47.0	1752.2	55.6		

REAR PORTS

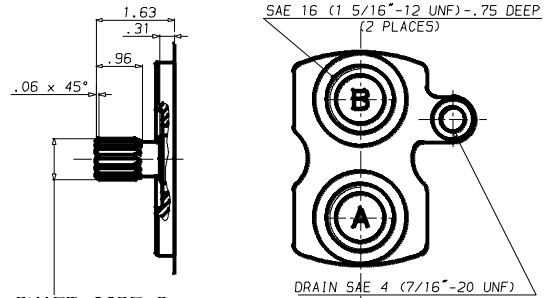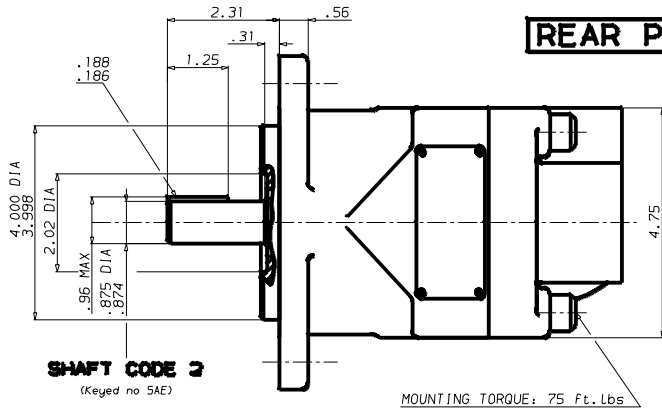


SAE THREADED PORT

DRAIN SAE 4 (7/16\"-20 UNF) OR 1/4\" B5PP (Plug for internal drain)

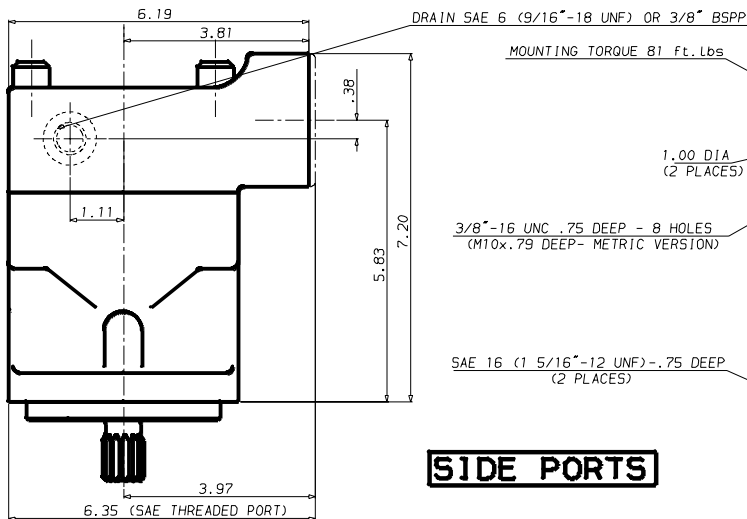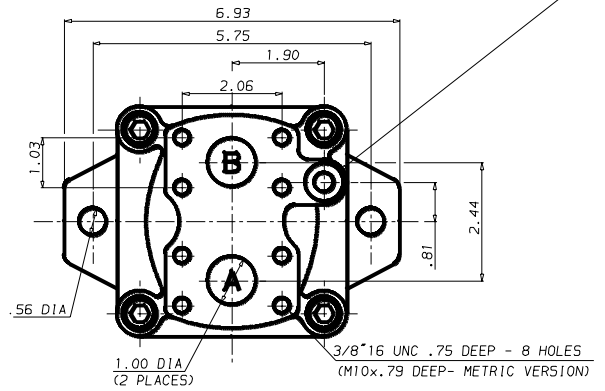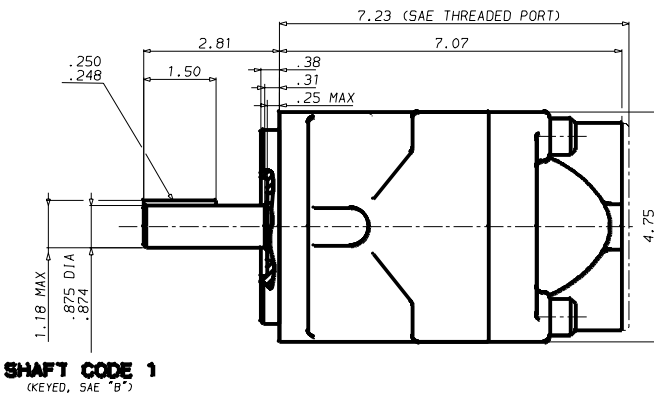


SIDE PORTS

SAE THREADED PORT

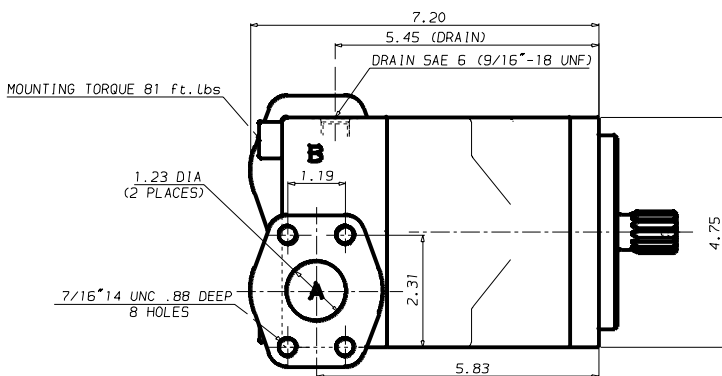

OPPOSITE PORTS

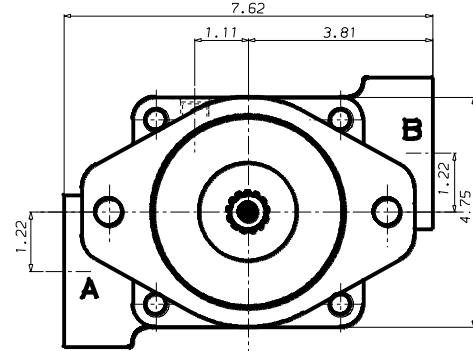

ORDERING CODE - M4D - M4SD SERIES

Model No. M4*D1
M4*D - 138 - 1 N 00 - B 1 02 ..

Series external drain _____

Series internal drain _____

Torque _____

062 = .63 in.lb/PSI
074 = .75 in.lb/PSI
088 = .88 in.lb/PSI
102 = .96 in.lb/PSI
113 = 1.13 in.lb/PSI
128 = 1.28 in.lb/PSI
138 = 1.40 in.lb/PSI

Type of shaft _____

1 = keyed (SAE C)
3 = splined (SAE C)

Rotation _____

N = bi-directional

Modification

Port connections

01 = SAE threaded port
SAE drain
02 = SAE 4 bolt flange
UNC threaded - SAE drain
04 = SAE 4 bolt flange
UNC threaded - BSPP drain
M4 = SAE 4 bolt flange
metric threaded - BSPP drain

Seal class

1 = S1 (M4D)
5 = S5 (M4SD)

Design letter




Porting combination

00 = standard

* = S = Severe duty motor.

M4D1 - M4SD1 : Drain port is plugged.




View from shaft end :
CW rotation A = inlet CCW rotation A = outlet
B = outlet B = inlet

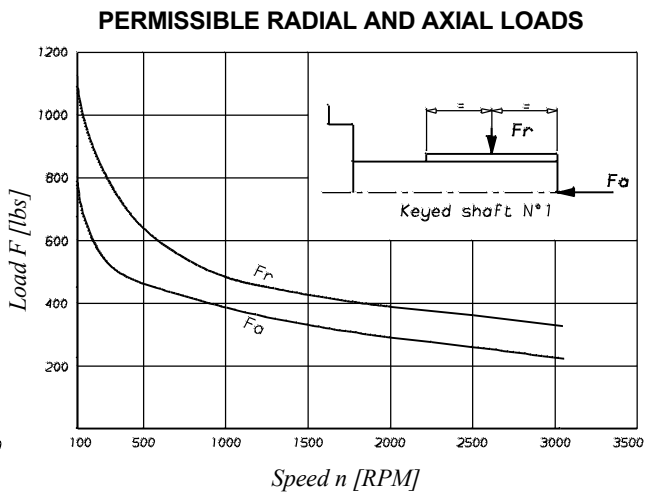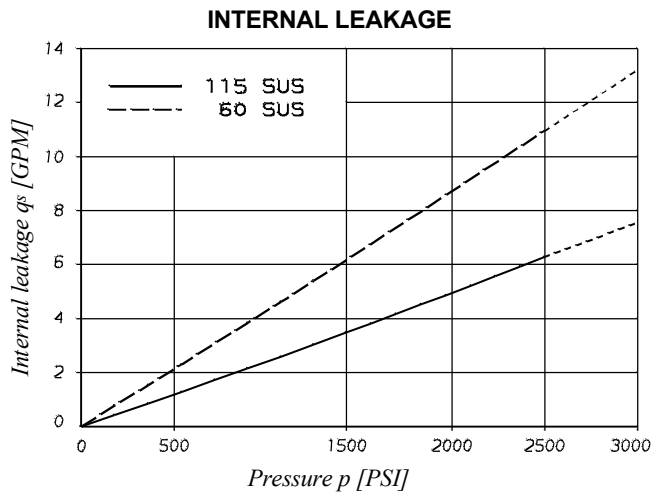


Do not apply Fr and Fa loads simultaneously

OPERATING CHARACTERISTICS - TYPICAL [115 SUS]


Model	Volumetric displacement V_i in ³ /rev.	Input flow at n = 2000 RPM		Torque T	Power output
		Theoretical	at 2500 PSI Δp	at n = 2000 RPM	at n = 2000 RPM
		GPM	GPM	at 2500 PSI Δp	at 2500 PSI Δp
				in.lbf	HP
M4D - M4SD 062	3.97	33.8	40.0	1460.0	46.4
M4D - M4SD 074	4.69	41.5	47.8	1770.0	56.2
M4D - M4SD 088	5.56	48.0	54.4	2088.5	66.2
M4D - M4SD 102	6.44	55.5	61.8	2336.3	74.1
M4D - M4SD 113	7.12	61.5	67.9	2655.0	84.2
M4D - M4SD 128	8.08	70.0	76.3	3009.0	95.5
M4D - M4SD 138	8.81	76.3	82.7	3292.0	104.5

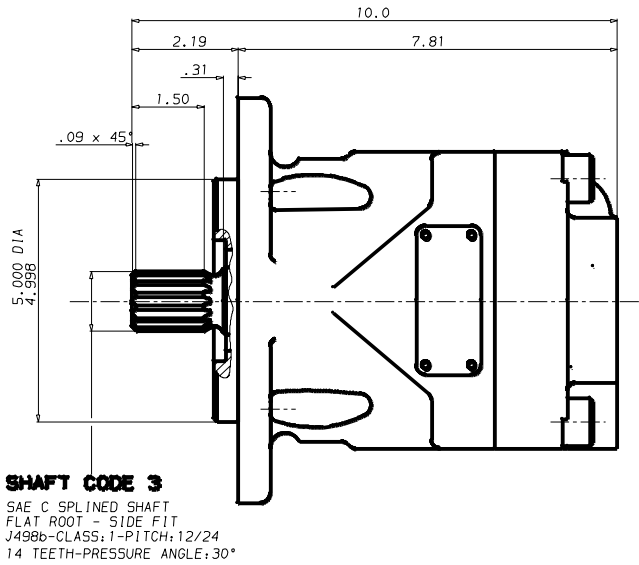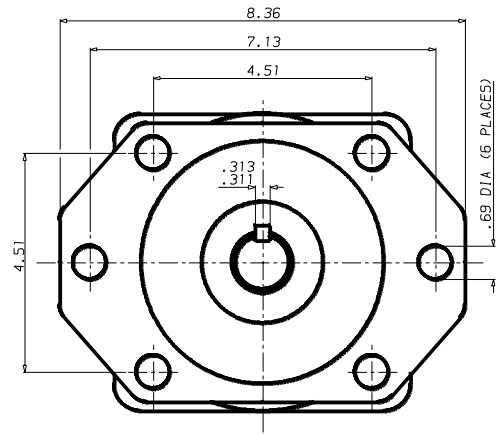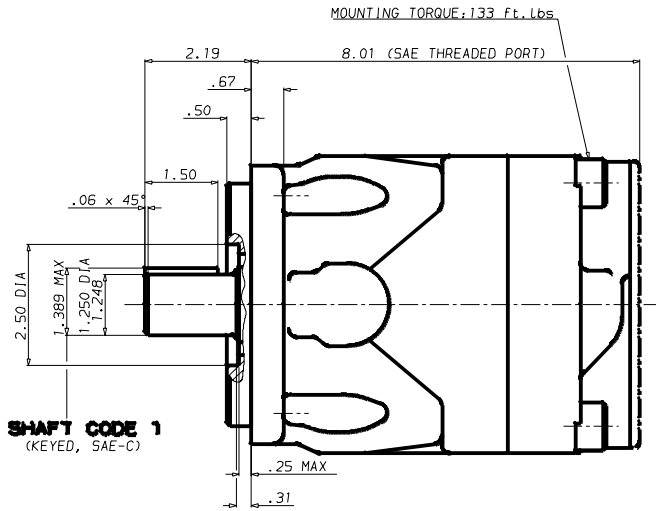

7/16" 14 UNC .87 DEEP-8 HOLES
(M12 x .87 DEEP-METRIC VERSION)

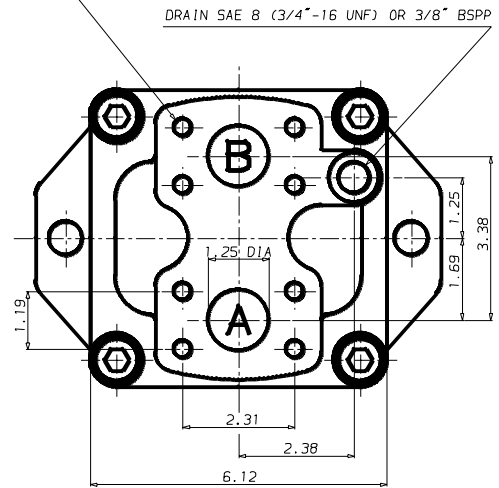

SAE 20 (1 5/8"-16 UNF) x .75 DEEP-2 HOLES

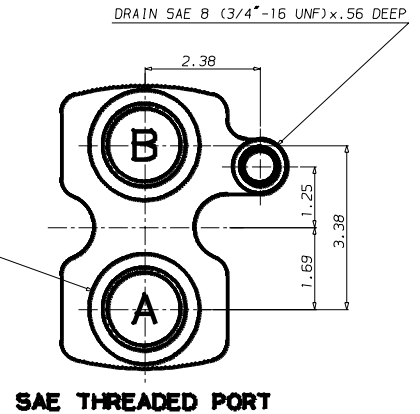

ORDERING CODE - M4E - M4SE SERIES

Model No. M4*E1
M4*E - 214 - 1 N 00 - B 5 02 ..

Series external drain _____
Series internal drain _____

Torque _____
 153 = 1.54 in.lb/PSI
 185 = 1.86 in.lb/PSI
 214 = 2.16 in.lb/PSI

Type of shaft _____
 1 = keyed (SAE C)
 3 = splined (SAE C)

Rotation _____
 N = bi-directional

* = S = Severe duty motor.

Modification
Port connections
 01 = SAE threaded port
 SAE drain
 02 = SAE 4 bolt flange
 UNC threaded - SAE drain
 04 = SAE 4 bolt flange
 UNC threaded - BSPP drain

Seal class
 5 = S5


Design letter

Porting combination
 00 = standard

M4E1 - M4SE1 : Drain port is plugged.


View from shaft end :

CW rotation A = inlet CCW rotation A = outlet
 B = outlet B = inlet




00

INTERNAL LEAKAGE

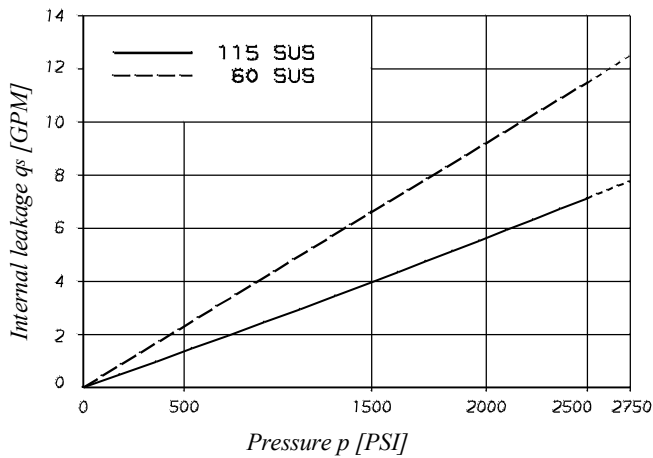



PERMISSIBLE RADIAL AND AXIAL LOADS

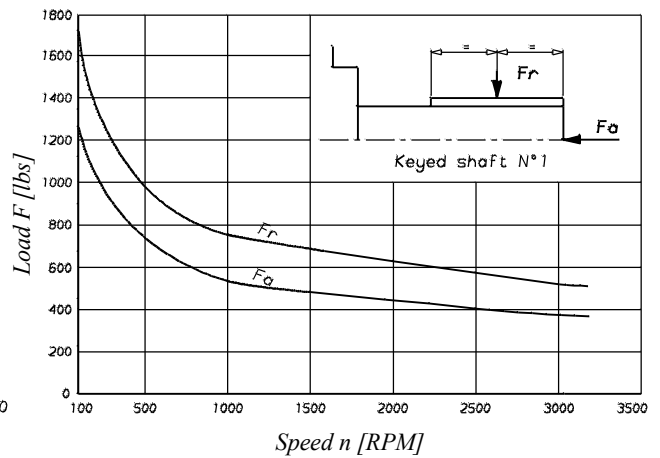

Do not apply Fr and Fa loads simultaneously


OPERATING CHARACTERISTICS - TYPICAL [115 SUS]

Model	Volumetric displacement V_i in ³ /rev.	Input flow at n = 2000 RPM		Torque T at n = 2000 RPM	Power output at n = 2000 RPM
		Theoretical	at 2500 PSI Δp	at 2500 PSI Δp	at 2500 PSI Δp
		GPM	GPM	in.lbf	HP
M4E - M4SE 062	9.67	83.7	90.6	3522.0	111.8
M4E - M4SE 074	11.69	101.2	108.0	4283.2	136.0
M4E - M4SE 088	13.55	117.3	124.2	5017.7	159.3

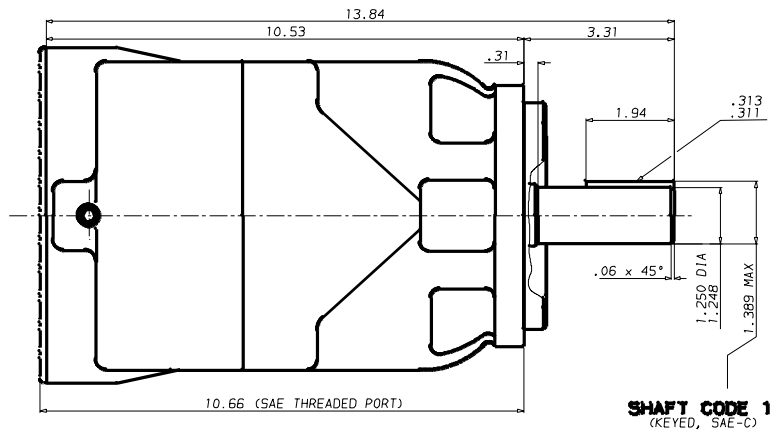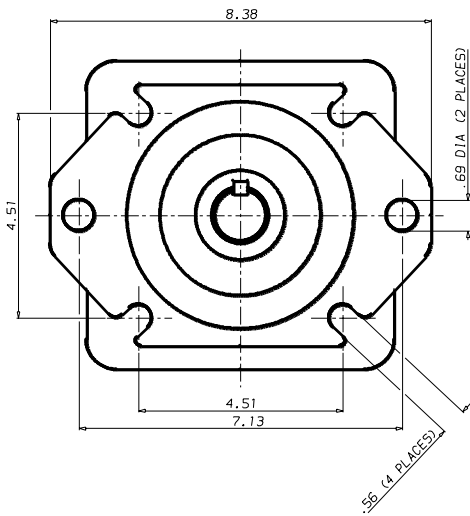


DRAIN SAE 8 (3/4"-16 UNF) OR 1/2" BSPP


MOUNTING TORQUE: 173 ft. Lbs

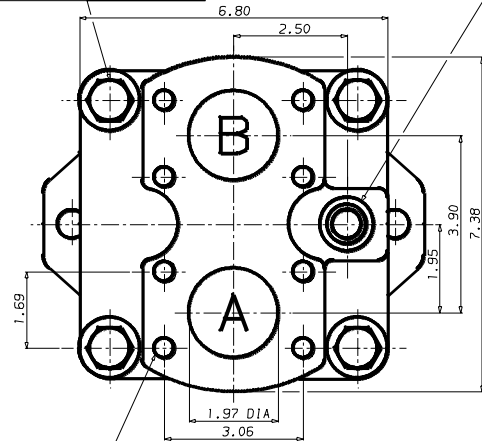

8 THREADED HOLES
1/2"-13 UNC 1.06 DEEP

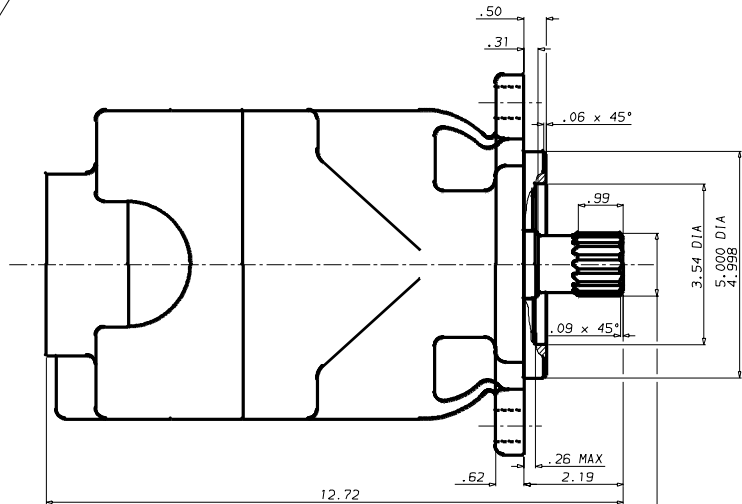

SHAFT CODE 3
SAE C SPLINED SHAFT
FLAT ROOT - SIDE FIT
J4980-CLASS:1-PITCH:12/24
14 TEETH - PRESSURE ANGLE:30°

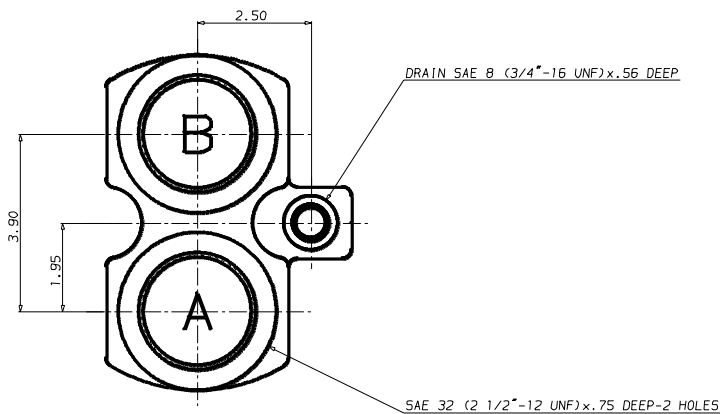

SAE THREADED PORT

Model No. M4*DC1
M4*DC - 138 - 031 - 1 N 00 - B 1 02 00 ..

Series external drain ————

Series internal drain ————

Torque for A1 - B1
062 = .63 in.lb/PSI
074 = .75 in.lb/PSI
088 = .88 in.lb/PSI
102 = .96 in.lb/PSI
113 = 1.13 in.lb/PSI
128 = 1.28 in.lb/PSI
138 = 1.40 in.lb/PSI

Torque for A2 - B2
024 = .24 in.lb/PSI
027 = .28 in.lb/PSI
031 = .33 in.lb/PSI
043 = .45 in.lb/PSI
055 = .57 in.lb/PSI
067 = .69 in.lb/PSI
075 = .78 in.lb/PSI

Type of shaft
1 = keyed (SAE C)
3 = splined (SAE C)

* = S = Severe duty motor.

Modification
No control
Port connections (P2)
01 = SAE threaded SAE drain
02 = SAE 4 bolt flange SAE drain
04 = SAE 4 bolt flange BSPP drain

Seal class
1 = S1 (M4DC)
5 = S5 (M4SDC)

Design letter



Porting combination
See below

Rotation
N = bi-directional


View from shaft end :
CW rotation A = inlet CCW rotation A = outlet
B = outlet B = inlet

M4DC1 - M4SDC1 : Drain port is plugged.


INTERNAL LEAKAGE

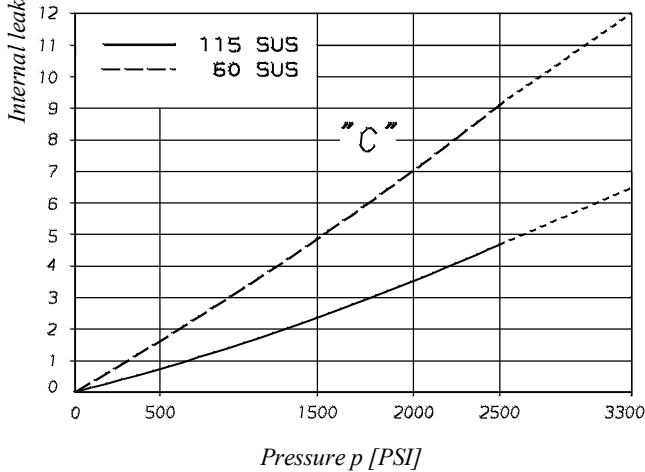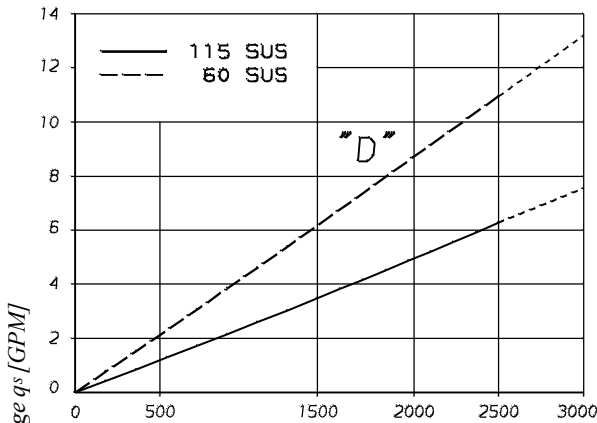

PORTING COMBINATION

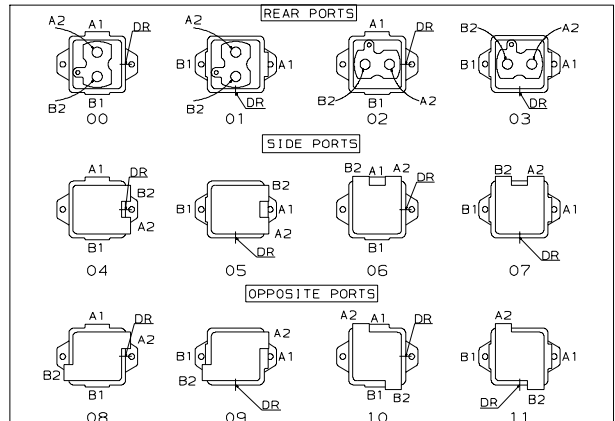


PERMISSIBLE RADIAL AND AXIAL LOADS

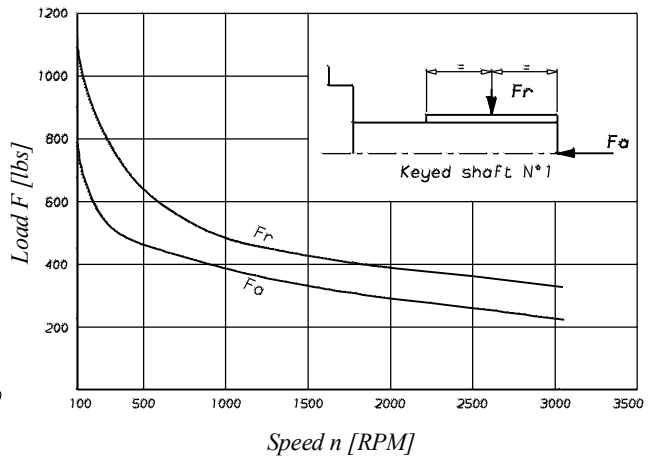

Do not apply Fr and Fa loads simultaneously

REAR PORTS

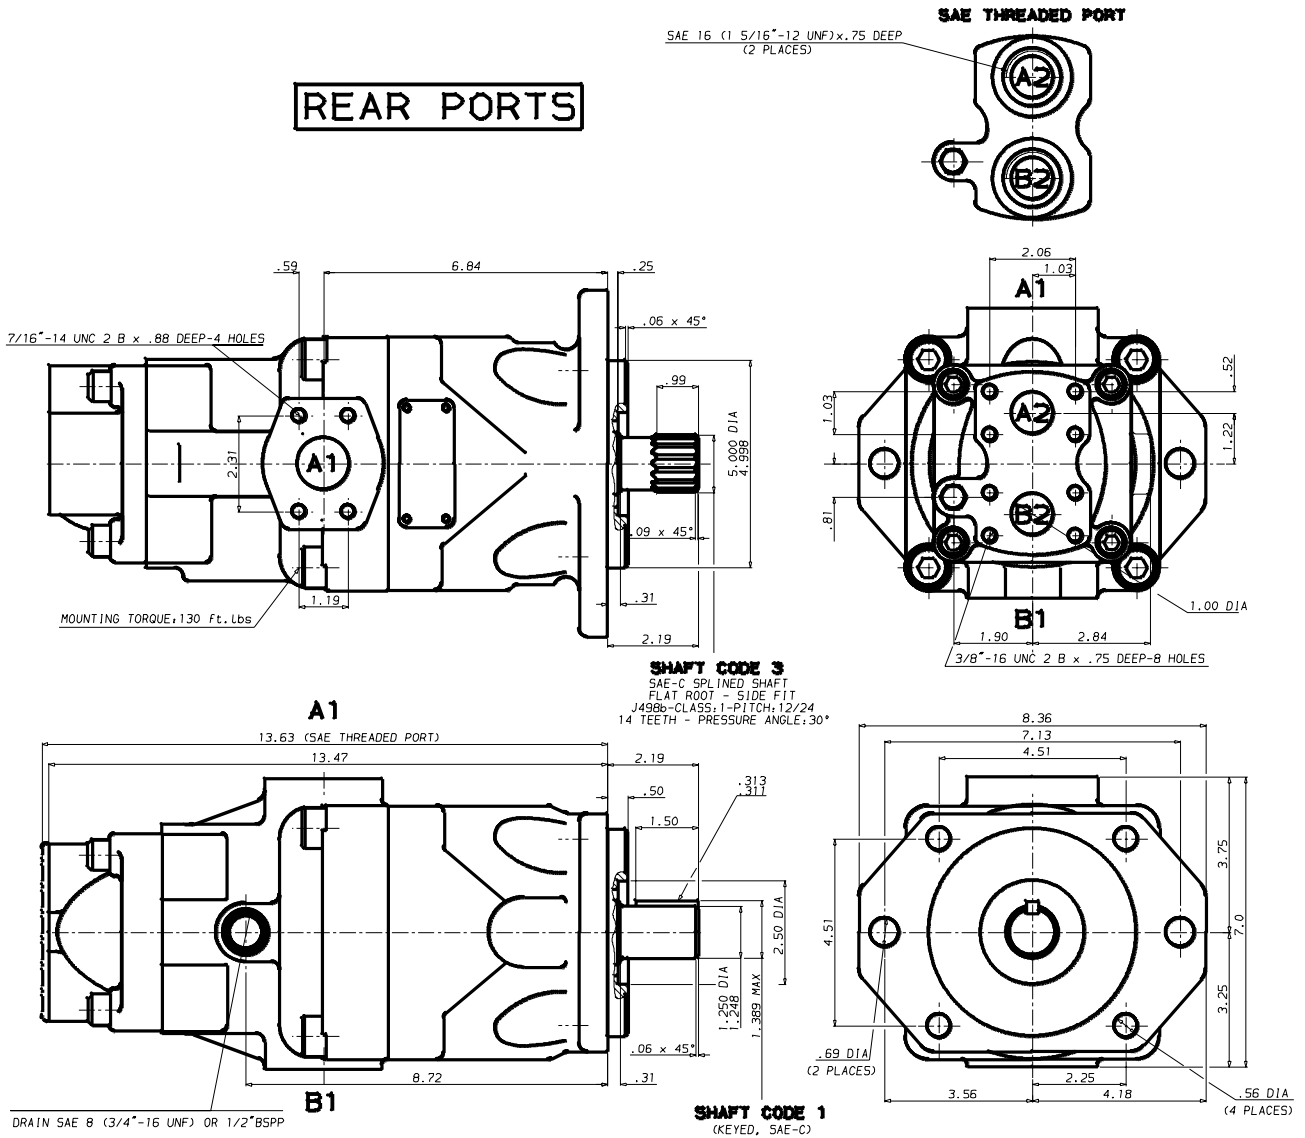


OPERATING CHARACTERISTICS - TYPICAL [115 SUS]





Model	Volumetric displacement V_i in ³ /rev.	Input flow at n = 2000 RPM		Torque T	Power output
		Theoretical	at 2500 PSI Δp	at n = 2000 RPM	at n = 2000 RPM
				at 2500 PSI Δp	at 2500 PSI Δp
		GPM	GPM	in.lbf	HP
M4D - M4SD 062	3.97	33.8	40.0	1460.0	46.4
M4D - M4SD 074	4.69	41.5	47.8	1770.0	56.2
M4D - M4SD 088	5.56	48.0	54.4	2088.5	66.2
M4D - M4SD 102	6.44	55.5	61.8	2336.3	74.1
M4D - M4SD 113	7.12	61.5	67.9	2655.0	84.2
M4D - M4SD 128	8.08	70.0	76.3	3009.0	95.5
M4D - M4SD 138	8.81	76.3	82.7	3292.0	104.5
M4C - M4SC 024	1.49	13.0	17.7	535.4	17.0
M4C - M4SC 027	1.72	14.8	19.5	619.5	19.7
M4C - M4SC 031	2.11	18.5	23.2	768.0	24.0
M4C - M4SC 043	2.84	24.6	29.3	1062.0	33.6
M4C - M4SC 055	3.59	31.2	36.0	1318.6	41.8
M4C - M4SC 067	4.34	37.5	42.3	1504.5	47.7
M4C - M4SC 075	4.89	42.3	47.0	1752.2	55.6

SIDE PORTS

SAE 16 (1 5/16"-12 UNF)x.75 DEEP
(2 PLACES)



SAE THREADED PORT

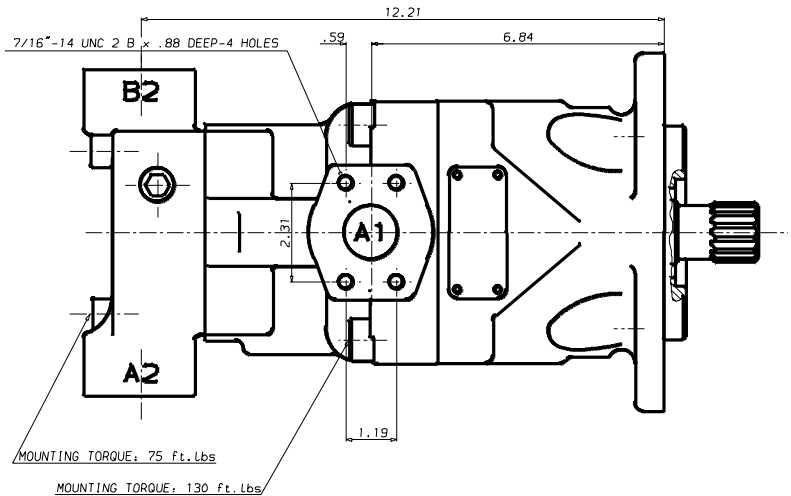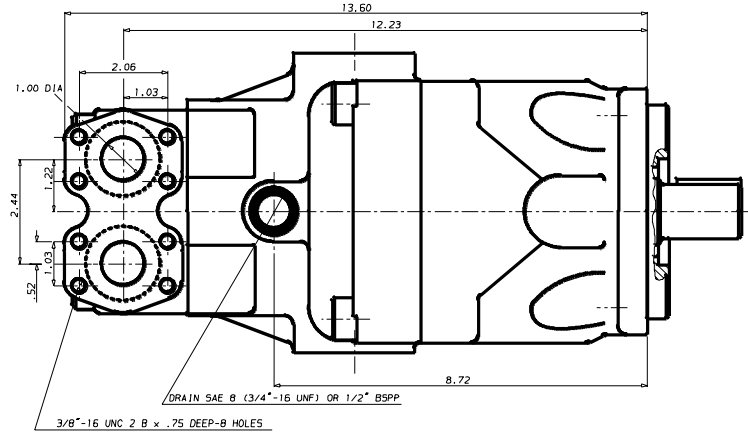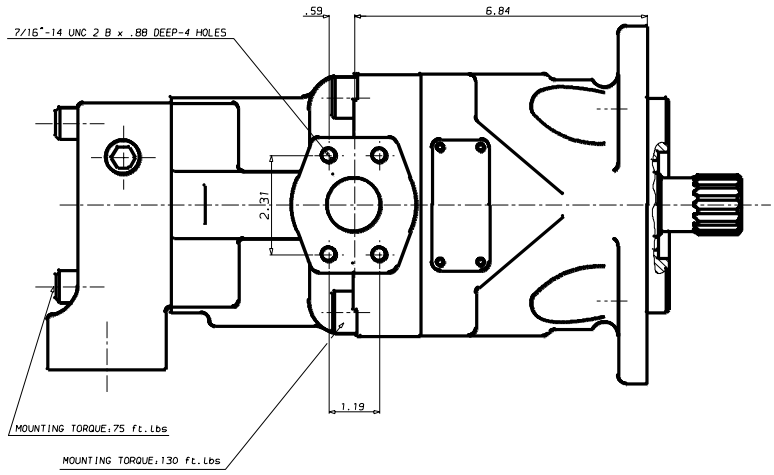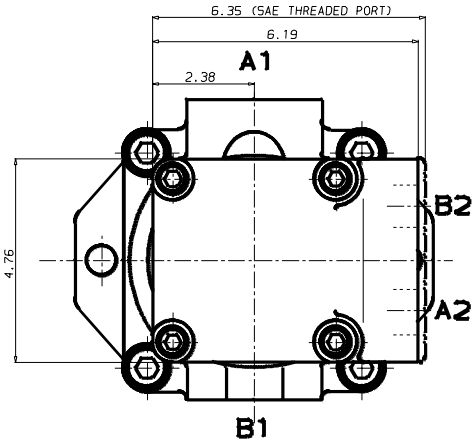

OPPOSITE PORTS

